


SPRING PRODUCT CATALOG



/// OVER 130 **NEW TOOLS** /// 5-STAR RATED **PRODUCTS**

/// BACKED BY A **5 YEAR WARRANTY**

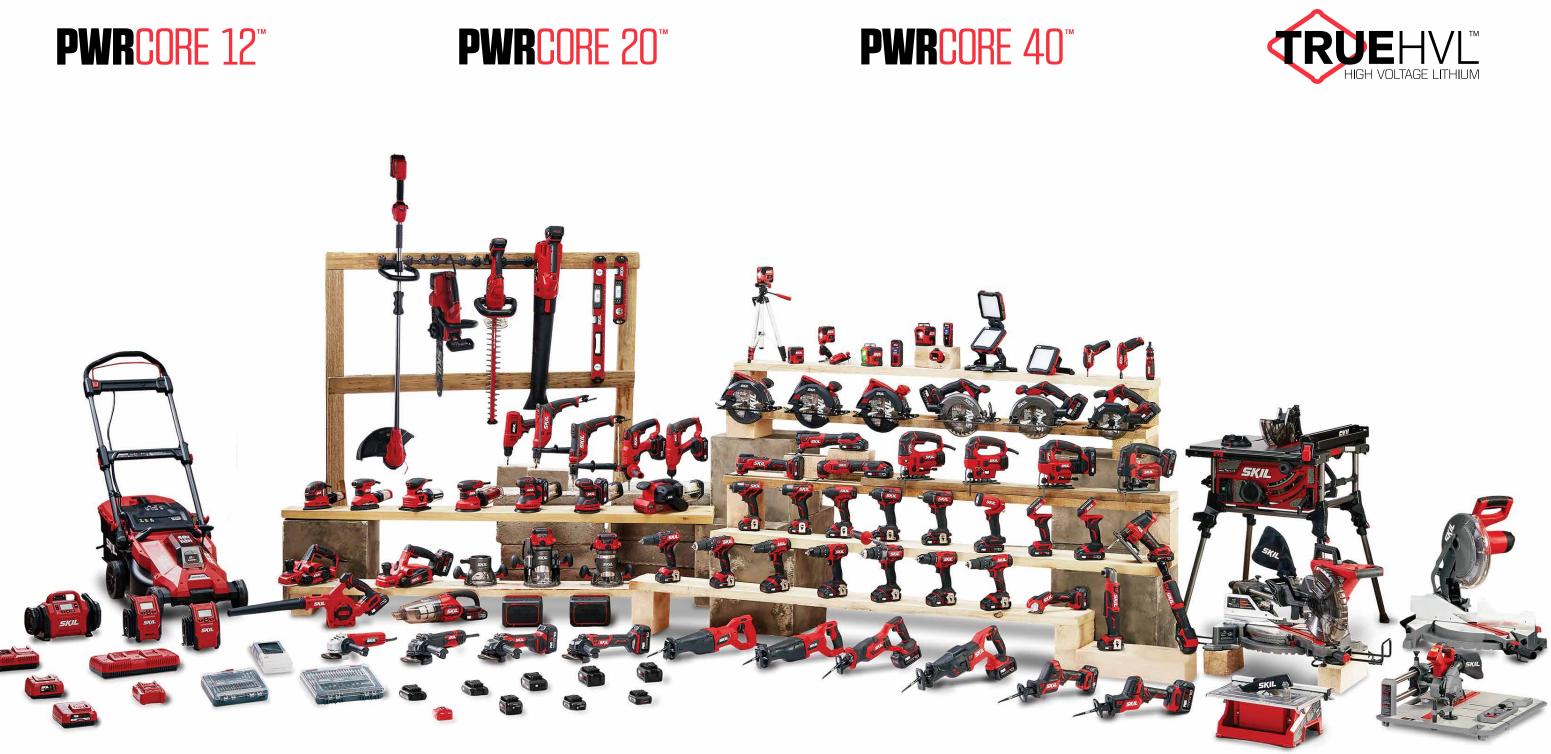

SK//L°



6 **PWR**CORE 12[™] **SYSTEM** 6-15 TOOLS 16-21 COMBO KITS

22 **PWR**CORE 20[™] **SYSTEM** 22-36 TOOLS 37-41 COMBO KITS 42-45 OUTDOOR POWER

46 PWRCORE 40[™] **SYSTEM 46-51 OUTDOOR POWER**

52 HIGH PERFORMANCE CUTTING

52-57 TRUEHVL[™] CORDLESS 58-67 CORDED

68 CORDED TOOLS

68-81 TOOLS

82 LASERS & LEVELS

82-87 TOOLS

88 4V TOOLS & ACCESSORIES

88-95 TOOLS & ACCESSORIES

PURCORE 12

The **PWR**CORE 12[™] system offers a range of tools with compact, lightweight power and innovative features.



WARRANTY



PATENTED BATTERY TECHNOLOGY **PWRCORE 12**"



Industry leading battery technology wraps each cell with cooling material to keep the battery powering on for 25% longer run time and 2X battery life.

5-MINUTE CHARGING PWRJUMP[®]



PWRJUMP[™] boosts the battery from 0 to 25% power in 5 minutes giving enough power to blast through up to 100 screws. (Based on 2.0Ah battery)

MOBILE CHARGING PWRASSIST



Built-in USB port offers convenient, on-the-go charging for mobile devices.



SKIL

DL529002 PWRCORE 12[™] BRUSHLESS 12V 1/2[™] DRILL DRIVER KIT WITH **PWR**JUMP[™] CHARGER



Features

) HYBRID CHUCK™

Secure bit with chuck jaws or lock 1/4" hex bit without tightening

) 1/2 IN. SINGLE-SLEEVE, KEYLESS CHUCK For fast and easy bit changes

) LED LIGHT

See work more clearly

350 IN. LBS OF TORQUE

Brushless motor delivers up to 350 in. Ibs of torque



Specifications

Speed	0-450/0-1700 RPM
Torque	350 in. lbs
Chuck Size	1/2" with Integrated 1/4" Hex for Holding Screw Bits
Torque Settings	17 Settings + Drill Mode
Length	7-1/8" (180mm)

Includes

Drill Driver 2.0Ah **PWR**ASSIST™ Battery **PWR**JUMP™ Charger PH2 Bit Belt Clip



/// PWRCORE 12" SYSTEM



BRUSHLESS

ID574402 PWRCORE 12[™] BRUSHLESS 12V 1/4[™] HEX IMPACT DRIVER WITH **PWR**JUMP[™] CHARGER

Features

) HALO LIGHT™ 5X more light than standard LEDs and reduces shadows

) 1/4" HEX COLLET


Fast, easy bit changes

) 2-SPEED TORQUE SELECTION

Use low speed for more accurate control and high speed for more power

25% LONGER RUN TIME 5-MINUTE CHARGING

ED- CHARGE MOBILE DEVICES



Includes

Impact Driver 2pcs 2.0Ah **PWR**ASSIST™ Batterv PWRJUMP™ Charger 2" Bit PH2 Belt Clip





Features COMPACT SIZE

The digital brushless motor provides compact, lightweight power) 0-50° BEVEL CAPACITY Easily cut a variety of angles) 18 TOOTH CARBIDE BLADE For fast and clean cuts) ELECTRIC BRAKE Stops blade quickly

25% LONGER RUN TIME



Features

QUICK RELEASE LEVER For fast and convenient accessory changes) HALO LIGHT™ 5X brighter light than common LEDs and reduces shadows) COMPACT SIZE

lightweight power

1	25% LONGE RUN TIME



For easy bit changes





OBRUSHLESS

IW5744-10 PWRCORE 12[™] BRUSHLESS 12V 3/8'' IMPACT WRENCH WITH BATTERY AND **PWR**JUMP[™] CHARGER

Features


) COMPACT SIZE This 3/8" Impact Wrench's digital brushless motor provides compact, lightweight power) QUICK & EASY SOCKET CHANGES

3/8 inch square anvil with friction ring reduces downtime between changes

) MATCH THE POWER TO THE APPLICATION Two speed modes for greater control







Includes

Impact Wrench 2.0Ah Battery with Mobile Charging PWRJUMP™ Charger Belt Clip Battery Jacket

Specifications

Clutch Setting

Includes

Hammer Drill

Belt Clip

PH2 Bit

Battery Jacket

2.0Ah Battery with USB

PWRJUMP™ Charger

1/2"

350 in.lbs

17+1+1

0-450/0-1700 RPM

0-6750/0-25500 IPM



HD5290A-10 PWRCORE 12[™] BRUSHLESS 12V 1/2" HAMMER DRILL KIT WITH **PWR**JUMP[™] CHARGER


Features


) THREE FUNCTIONS IN ONE Easily transition between hammer drill, drill and screwdriver modes

) 1/2" KEYLESS RATCHETING CHUCK For superior bit gripping strength

Pre-light and after-glow illuminates work area for precise drilling










10 www.skil.com

BRUSHLESS







O BRUSHLESS

Features

900 IN. POUNDS OF TORQUE 90° ANGLED HEAD Compact head is ideal for tight spaces

) HALO LIGHT™ 5X brighter light than common LEDs and reduces shadows) 1/4 IN. COLLET



CR541802 PWRCORE 12[™] BRUSHLESS 12V 5-1/2" CIRCULAR SAW WITH 4.0AH BATTERY AND **PWR**JUMP[™] CHARGER



CHARGE MOBILE DEVICES

Specifications

Blade Size	5-1/2"
Speed	4200 RPM
Bevel Capacity	0-50°
Cutting Depth (90°)	1-5/8"
Cutting Depth (45°)	1-3/16"
Tool Size	10.9" x 6.5" x 9.6"

Includes

Circular Saw 4.0Ah **PWR**ASSIST™ Battery **PWR**JUMP™ Charger 18T Thin Kerf Carbide Wood Cutting Blade Allen Key Vacuum Adapte Battery Jacket

OS592702 PWRCORE 12[™] BRUSHLESS 12V OSCILLATING MULTITOOL KIT WITH BATTERY AND **PWR**JUMP™ CHARGER

The digital brushless motor provides compact,



MOBILE DEVICES

Specifications

Interface for Accessories	12 Pin OIS
Oscillating Angle	3.6°
Variable 6 Speed Dial	11000-18000 OPM
Length	11"

Includes

Multi-Tool 2.0Ah PWRASSIST™ **Battery** PWRJUMP™ Charger 35pcs Sanding Paper Sanding Pad

Bi-metal Plunge Blade HCS Wood Blade HCS Segment Blade Rigid Scraper Battery Jacket

RI574502 PWRCORE 12[™] BRUSHLESS 12V 1/4" HEX RIGHT ANGLE IMPACT DRIVER WITH BATTERY AND **PWR**JUMP[™] CHARGER

The power to drive large fasteners and bolts

Specifications

Chuck	1/4" Hex Collet
Torque	900 In. lbs
Speed	0-2700 RPM, 0-3750 IPM
Length	12.3"
Tool Size	2.6" x 2.7" x 12.3"

Includes

Right Angle Impact 2.0Ah PWRASSIST™ Batterv **PWR**JUMP™ Charger PH2 Bit Belt Clip Battery Jacket



RS582802 PWRCORE 12[™] BRUSHLESS 12V COMPACT RECIPROCATING SAW WITH BATTERY AND **PWR**JUMP[™] CHARGER

Features

) TOOL-LESS BLADE CHANGE For guick blade changes

3/4 INCH STROKE

For fast and clean cuts

VARIABLE SPEED CONTROL

Precision speed control

PIVOTING SHOE Create smoother cuts and minimizes vibration

O BRUSHLESS







O BRUSHLESS



Features

) THE MOST POWERFUL AND CONTROLLED **CUTTING JIGSAW IN ITS CLASS**

COMPACT DESIGN Greater control for detail wood cutting

) HALO LIGHT™ 5X more light common LEDs

) 4-STAGE ORBITAL

Cut through a variety of metals with ease) TOOL-FREE BLADE CLAMP

Replace T or U Shank saw blades in a matter of seconds



CHARGE MOBILE DEVICES

Specifications

Stroke	3/4" (18mm)
Speed	0-3000 SPM
Tool Size	12-3/4" x 2-3/4" x 5-1/2"

Includes

Compact Recip Saw 2.0Ah **PWR**ASSIST™ Battery PWRJUMP™ Charger Wood Cutting Blade Battery Jacket

LH5533-00 PWRCORE 12[™] 12V FLOOD LIGHT, TOOL ONLY

Features

COMPACT AND LIGHTWEIGHT LED panel work light with ultra-thin head illuminates dark areas with up to 850 lumens for greater visibility) ILLUMINATION CONTROL

Choose high or low depending on your project) MULTI-POSITION HANDLE Rotates 180 degrees and can be used as a rafter hook, carrying handle, or stand

Specifications

opeointoatione	
Stroke Distance	7/8'' (22mm)
Speed	800-3000 SPM
Bevel	0°, ± 15°, ± 30°, ± 45°
Tool Size	8.4" x 2.7" x 7" (213 x 69 x 179mm)

Includes

Jigsaw 2.0Ah Battery with USB **PWR**JUMP™ Charger Wood Cutting Blade Metal Cutting Blade Battery Jacket Allen Wrench

160.0 160.0 SKIL

Features

hands-free

PSI in real time

) COMPACT SIZE or garage

) ON BOARD ADAPTER STORAGE Keeps adapters handy and accessible



ES4651A-00 PWRCORE 12[™] 12V MULTI-CUTTER. TOOL ONLY

Features

) 1/4" CUTTING CAPACITY

Cuts a variety of materials like cardboard, carpet, leather, or vinyl

SELF-SHARPENING BLADE Provides more precise and efficient cutting

) COMPACT SIZE

Lightweight and ergonomic handle design reduces user fatigue

) LOCK-OFF SWITCH Prevents accidental startups

Specifications

Speed	300 RPM
Max Cutting Thickness	1/4" (6mm)
Blade Size	1-9/16" (40mm)
Tool Size	9-17/32" x 4-1/4" x 2-23/32"

Includes Multi-Cutter 1-9/16" Blade



TOOL ONLY

Features

) PORTABLE SPEAKER This bluetooth speaker's design makes it easy to bring along wherever you go **QUALITY SOUND** Dual passive bass radiators allow for improved bass sound

Specifications

Two Settings	850 or 550 Lumens
Runtime	Up to 4.5 Hours in High Setting with SKIL 12V 4.0Ah Battery
Pivoting Angles:	7 Handle Positions From 0-180°
Weight	1.51 lbs. (0.69kg)

Includes

Flood Light

IF5943-00 PWRCORE 12[™] 12V INFLATOR, TOOL ONLY

HIGH PRESSURE MODE WITH AUTO SHUTOFF

Quickly inflates tires, sports equipment, and more

) 12V TIRE INFLATOR WITH GAUGE Equipped with digital pressure gauge to set and view

Easy to store, and portable size perfect for the car

Specifications

Pressure	Up to 160 PSI
Hose Length	28"
Tool Size	7-7/8" x 5-5/8" x 5-3/4"

Includes

Inflator Presta Valve Adapter Sports Ball Needle Pinch Valve Adapte

R0502601 PWRCORE 12[™] BLUETOOTH 12V SPEAKER.

) LONGER RUN TIME & BATTERY LIFE

Uses the same industry leading PWRCore 12[™] lithium battery technology as your tools. Battery sold separately.

Specifications

Bluetooth Distance	Up to 100ft
USB Output	5V, 2.1Amp
Speaker	2.5'' 10W
USB Port	2.1A 5V
Auxiliary Input	3.5 mm

Includes

Speaker AUX Cable



LH5537A-00 PWRCORE 12[™] 12V MECHANICAL LIGHT, TOOL ONLY

Features

) BRIGHTEN YOUR WORKSPACE

Ultra-bright and compact LED light illuminates dark areas up to 600 lumens, with settings for high, low, or strobe depending on the project

> MULTI-DIRECTIONAL LIGHT

180° pivoting head with 270° left/right swivel provides versatility for lighting

> MULTIPLE HANGING OPTIONS

A built-in metal hook, rafter hook, and magnets that attach to car hood provide utility

Specifications

Brightness Settings	High 600lm, Low 300lm, Strobe 600lm
Lamp Head Rotation	180° vertical range, 270° swivel range
Run Time	High mode for up to 7.5 hours with 4.0Ah battery
Light Source	20 LEDs
Tool Size	14.69'' x 3.43'' x 2.44'' (373x87x62mm)

Includes 12V Mechanical Light



QC535701 PWRCORE 12[™] PWRJUMP[™] CHARGER

Features

> PWRJUMP™ CHARGING Charges up to 25% in just 5 minutes.* That's enough power to drive up 100 screws

IT DONE

TABLE OR WALL MOUNTING *Based on 2.0 Ah battery

BY500101 PWRCORE 12[™] LITHIUM 2.0AH 12V BATTERY WITH **PWR**ASSIST[™] MOBILE CHARGING

Features

> PWRCORE 12[™] LITHIUM TECHNOLOGY Industry leading battery technology; 25% longer run time and 2X longer battery life

> PWRASSIST™ MOBILE CHARGING Utilize USB port on the battery to charge other devices

) FUEL GAUGE

LED charge status indicators show how much power is left

Fuel Gauge Charger

Specifications

Rechargeable

All SKIL 12V Tools

Only with SKIL 12V

Lithium-Ion

12V

2.0Ah

5V, 1.0A

Green LED

Battery Type

Voltage

Capacity

USB Port

Compatibility

Includes

2.0Ah **PWR**ASSIST™ Battery Battery Jacket



BY519801 PWRCORE 12™ LITHIUM 4.0AH 12V BATTERY WITH **PWR**ASSIST[™] MOBILE CHARGING

Features

> PWRCORE 12[™] LITHIUM Industry leading battery technology; 25% longer

run time and 2X longer battery life > PWRASSIST™ MOBILE CHARGING

Utilize USB port on the battery to charge other devices

) FUEL GAUGE


LED charge status indicators show how much power is left

Specifications

Battery Type	Rechargeable Lithium-Ion
Voltage	12V
Capacity	4.0Ah
USB Port	5V, 1.0A
Compatibility	All SKIL 12V Tools
Fuel Gauge	Green LED
Charger	Only with SKIL 12V

Includes

4.0Ah PWRASSIST™ Battery Battery Jacket

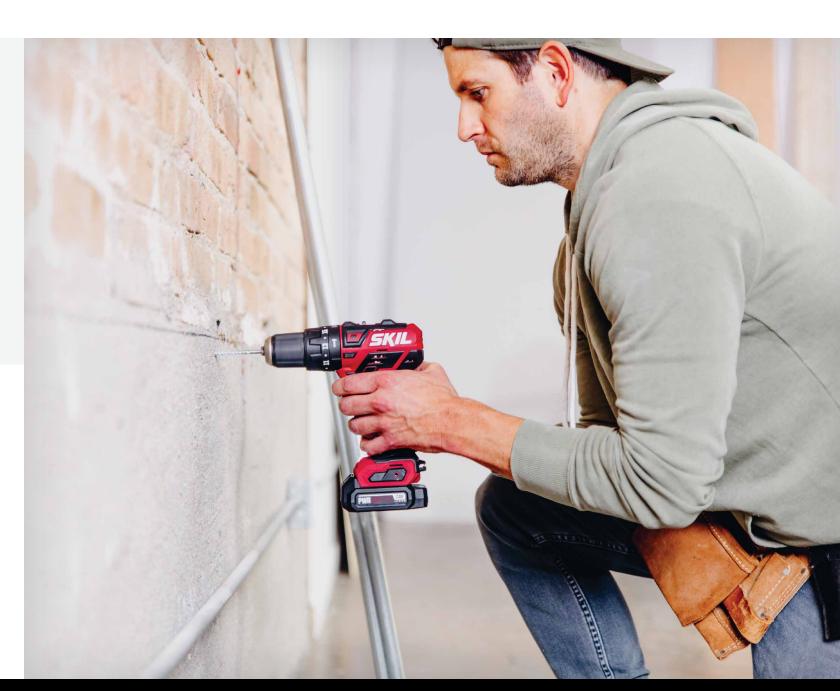

) PRESS THE PWRJUMP BUTTON AND CONSIDER

) BATTERY CHARGE STATUS INDICATORS

) USB PORT TO CHARGE OTHER DEVICES

Specifications

Input Voltage	120V
Input Power	90W
USB Port	5V, 1.0A Output
Compatibility	All SKIL 12V Tools

Includes

PWRJUMP™ Charger



CB737501 PWRCORE 12[™] BRUSHLESS 12V 1/2[™] DRILL DRIVER & LASER MEASURER KIT WITH **PWR**JUMP[™] CHARGER

Drill Driver Features

) HYBRID CHUCK™ Secure bit with chuck jaws or lock 1/4" hex bit without tightening

) 1/2 IN. SINGLE-SLEEVE, KEYLESS CHUCK For fast and easy bit changes

) LED LIGHT See work more clearly

350 IN. LBS OF TORQUE

Brushless motor delivers up to 350 in. Ibs of torque

Laser Measurer / Level Features

THREE WAYS TO MEASURE Laser measures distance, area,

or in real time up to 100 feet

) DIGITAL LEVELING MODE Digital accuracy with real-time arrow guidance

) INDIRECT MEASURING

Calculates distances past obstacles

) HOLD FEATURE Save readings for later reference



CHARGE MOBILE DEVICES

Specifications		
Drill Driver		
Speed	0-450/0-1700 RPM	
Torque	350 in. lbs	
Chuck size	1/2" with Integrated 1/4" Hex for Holding Screw Bits	
Torque settings	17+ Drill Mode	
Length	7-1/8" (180mm)	
Laser Measurer / Level		
Laser Type	635nm, Output < 1mW	
Laser Class	Class II	
Distance Measuring accuracy	+/- 1/8"	
Measuring Range	Up to 100ft.	
Angle Measuring Accuracy	±0.5°	

Includes

Drill Driver Laser Distance Measurer & Level 2.0Ah PWRASSIST Soft Bag Battery **PWR**JUMP™ Charger Micro USB Charging Belt Clip Cord PH2 Bit

Circular Saw Features

without tightening

) LED LIGHT

) 0-50° BEVEL CAPACITY Easily cut a variety of angles) 18 TOOTH CARBIDE BLADE For fast and clean cuts **) ELECTRIC BRAKE** Stops blade quickly) DEPTH ADJUSTMENT Quickly adjust depth for maximum performance

25% LONGER RUN TIME

CB742901 PWRCORE 12[™] BRUSHLESS 12V DRILL DRIVER & IMPACT DRIVER KIT WITH **PWR**JUMP[™] CHARGER

Drill Driver Features

HYBRID CHUCK™ without tightening For fast and easy bit changes) LED LIGHT See work more clearly

350 IN. LBS OF TORQUE

Impact Driver Features

HALO LIGHT™ shadows

) 1/4 IN. HEX COLLET Fast, easy bit changes

Use low speed for more accurate control and high speed for more power **VARIABLE SPEED TRIGGER**

Precision speed control



O BRUSHLESS

CB736701 PWRCORE 12[™] BRUSHLESS 12V DRILL DRIVER & IMPACT DRIVER KIT WITH **PWR**JUMP[™] CHARGER

Drill Driver Features

HYBRID CHUCK™

Secure bit with chuck jaws or lock 1/4" hex bit without tightening

) 1/2 IN. SINGLE-SLEEVE, KEYLESS CHUCK For fast and easy bit changes

) LED LIGHT

See work more clearly

350 IN. LBS OF TORQUE Brushless motor delivers up to 350 in. Ibs of torque


Impact Driver Features

) HALO LIGHT™ 5X more light than standard LEDs and reduces shadows

) 1/4 IN. HEX COLLET

Fast, easy bit changes) 2-SPEED TORQUE SELECTION Use low speed for more accurate control and high speed for more power





0-450/0-1700 RPM

Drill Driver Impact Driver 2pcs 2.0Ah PWRASSIST™ Batterv PWRJUMP™ Charger 2pcs Bit PH2 2pcs Belt Clip



O BRUSHLESS



O BRUSHLESS





Specifications

Speed

CB742701 PWRCORE 12[™] BRUSHLESS 12V DRILL DRIVER AND CIRCULAR SAW KIT WITH **PWR**JUMP[™] CHARGER

Drill Driver Features

HYBRID CHUCK™ Secure bit with chuck jaws or lock 1/4" hex bit

) 1/2" SINGLE-SLEEVE, KEYLESS CHUCK For fast and easy bit changes

See work more clearly 350 IN. LBS OF TORQUE Brushless motor delivers up to 350 in. Ibs of torque



ED- CHARGE MOBILE DEVICES

Specifications

Drill Driver	
Speed	0-450/0-1700 RPM
Torque	350 in. lbs
Chuck size	1/2" with Integrated 1/4" Hex for Holding Screw Bits
Torque settings	17+ Drill Mode
Length	7-1/8" (180mm)
Circular Saw	
Blade Size	5-1/2"
Speed	4200 RPM
Bevel Capacity	0-50°
Cutting Depth (90°)	1-5/8"
Cutting Depth (45°)	1-3/16"
Tool Size	10.9" x 6.5" x 9.6"

Includes

Drill Driver Circular Saw 4.0Ah PWRASSIST™ Batterv PWRJUMP™ Charger 18T Thin Kerf Carbide Wood Cutting Blade

Allen Kev Vacuum Adapter PH2 Bit Belt Clip Battery Jacket

Secure bit with chuck jaws or lock 1/4" hex bit

) 1/2" SINGLE-SLEEVE, KEYLESS CHUCK

Brushless motor delivers up to 350 in. Ibs of torque

5X more light than standard LEDs and reduces

2-SPEED TORQUE SELECTION

Specifications

Drill Driver	
Speed	0-450/0-1700 RPM
Torque	350 in. lbs
Chuck size	1/2" with Integrated 1/4" Hex for Holding Screw Bits
Torque settings	17+ Drill Mode
Length	7-1/8" (180mm)
Impact Driver	
Speed	0-1600/0-2600 RPM
Impact Rate	0-2500/0-3500 IPM
Collet	1100 in. lbs
Collet Size	1/4" Hex
Length	5-7/8" (149mm)

Includes

Drill Driver Impact Driver 2.0Ah PWRASSIST™ Batterv **PWR**JUMP™ Charger

2pcs Bit PH2 2pcs Belt Clip Battery Jacket



CB737601 PWRCORE 12[™] BRUSHLESS 12V 1/2[™] DRILL DRIVER & 12'' DIGITAL LEVEL KIT WITH **PWR**JUMP[™] CHARGER

Drill Driver Features

) HYBRID CHUCK™ Secure bit with chuck jaws or lock 1/4" hex bit without tightening

) 1/2" SINGLE-SLEEVE, KEYLESS CHUCK For fast and easy bit changes

) LED LIGHT

See work more clearly

350 IN. LBS OF TORQUE Brushless motor delivers up to 350 in. Ibs of torque

Digital Level Features

) HIGH-ACCURACY BLUE VIALS

The vials are easy to see, highly accurate, and show both vertical and horizontal levels

) READ FROM ANY PERSPECTIVE

The digital LCD screen is backlit for easy reading from any perspective, and the screen conveniently autoadjusts the orientation depending on how you hold it

) EASY TO USE

Up and down arrow indicators give you real-time leveling guidance





E CHARGE MOBILE DEVICES



CB743001 PWRCORE 12[™] BRUSHLESS 12V DRILL DRIVER & RIGHT ANGLE IMPACT DRIVER KIT WITH **PWR**JUMP[™] CHARGER

Drill Driver Features

) HYBRID CHUCK™ Secure bit with chuck jaws or lock 1/4" hex bit without tightening

) 1/2" SINGLE-SLEEVE, KEYLESS CHUCK For fast and easy bit changes) LED LIGHT See work more clearly 350 IN. LBS OF TORQUE

Brushless motor delivers up to 350 in. Ibs of torque

Right Angle Impact Driver Features

900 IN. POUNDS OF TORQUE The power to drive large fasteners and bolts) 90° ANGLED HEAD Compact head is ideal for tight spaces

) HALO LIGHT™ 5X brighter light than common LEDs and reduces shadows

) 1/4 IN. COLLET For easy bit changes



CHARGE MOBILE DEVICES

Specifications

Drill Driver 0-450/0-1700 RPM Speed 350 in. lbs Torque 1/2" with Integrated 1/4" Chuck size Hex for Holding Screw Bits 17+ Drill Mode Torque settings 7-1/8" (180mm) Length Digital Level 12" (30cm) Length Digital Level Accuracy: ±0.05° at 0° & 90°, ±0.2° at Other Angles Display Auto-Backlit Black on White

PH2 Bit

Belt Clip

Soft Case

(2) AAA Batteries

0-450/0-1700 RPM

Includes

Drill Driver 12" Digital Level 12V Battery **PWR**JUMP™ Charger Battery Jacket

Specifications

Drill Driver

No Load Speed



CB7431-10 PWRCORE 12[™] BRUSHLESS 12V 3-TOOL COMBO KIT WITH **PWR**JUMP[™] CHARGER

Drill Driver Features

) HYBRID CHUCK™ Secure bit with chuck jaws or lock 1/4" hex bit without tightening) 1/2" SINGLE-SLEEVE, KEYLESS CHUCK For fast and easy bit changes) LED LIGHT See work more clearly 350 IN. LBS OF TORQUE Brushless motor delivers up to 350 in. Ibs of torque

Inflator Features

HIGH PRESSURE MODE WITH AUTO SHUTOFF Quickly inflates tires, sports equipment, and more hands-free

PSI in real time

) COMPACT SIZE or garage

Area Light Features

) LOCK ON For continuous use without having to hold trigger) 120 DEGREE PIVOTING HEAD To direct light in work place **) HIGH/LOW LED SETTINGS** Up to 400 lumens



٤	25% LOI RUN TIM	NGI IE
E	► CHARG	iE

Torque	350 in. lbs
Chuck Size	1/2" with Integrated 1/4" Hex for Holding Screw Bits
Length	7-1/8" (180mm)
Torque	17 Settings + Drill Mode
Right Angle Impact D	river
Chuck	1/4" Hex Collet
Torque	900 In. lbs
Speed	0-2700 RPM, 0-3750 IPM
Speed Length	,

Includes

Drill Driver **Right Angle Impact Driver** 2.0Ah PWRASSIST™ Batterv PWRJUMP™ Charger 2pcs Bit PH2 2pcs Belt Clip Battery Jacket

18 www.skil.com

BRUSHLESS



) 12V TIRE INFLATOR WITH GAUGE Equipped with digital pressure gauge to set and view

Easy to store, and portable size perfect for the car



MOBILE DEVICES

Specifications

Drill Driver	
Speed	0-450/0-1700 RPM
Torque	350 in. lbs
Chuck size	1/2" with Integrated 1/4" Hex for Holding Screw Bits
Torque settings	17+ Drill Mode
Length	7-1/8" (180mm)
Inflator	
Pressure	Up to 160 PSI
Hose Length	28"
Tool Size	7-7/8" x 5-5/8" x 5-3/4"
Area Light	
LEDs	8
Lamp	400 Lumens Max

Includes

Drill Driver Inflator Area Light 2.0Ah Battery with USB PWRJUMP™ Charger Belt Clip

PH2 Bit Presta Valve Adapter Sports Ball Needle Pinch Valve Adapter Battery Jacket



CB736801 PWRCORE 12[™] BRUSHLESS 12V 5-TOOL COMBO KIT

Drill Driver Features

HYBRID CHUCK™

Secure bit with chuck jaws or lock 1/4" hex bit without tightening

) 1/2" SINGLE-SLEEVE, KEYLESS CHUCK For fast and easy bit changes

) LED LIGHT

See work more clearly

Impact Driver Features

) HALO LIGHT™

5X more light than standard LEDs and reduces shadows

> 1/4 IN. HEX COLLET Fast, easy bit changes

> 2-SPEED TORQUE SELECTION Use low speed for more accurate control and high speed for more power

Area Light Features

) LOCK ON

For continuous use without having to hold trigger) 120 DEGREE PIVOTING HEAD To direct light in work place **) HIGH/LOW LED SETTINGS** Up to 400 lumens

Oscillating Multi-Tool Features

HALO LIGHT™ 5X more light than standard LED without shadows **3.6 DEGREE OSCILLATING ANGLE** Faster cutting speeds) 6-SPEED AUTO SENSING Automatically adjusts based on your project

Bluetooth Speaker Features

) BLUETOOTH TECHNOLOGY Connect wirelessly up to 100 ft. away **) QUALITY SOUND**

Dual passive bass radiators allow for improved bass sound

) MULTIPLE INPUTS Connect with bluetooth technology or an auxiliary input, plus you can charge your device with the USB port







Drill Driver	
Speed	0-450/0-1700 RPM
Torque	350in. Ibs
Impact Driver	
Speed	0-1600/2600 RPM
Impact Rate	0-2500/3500 IPM
Torque	1100in. lbs
Area Light	
LEDs	8
Lamp	400 Lumens Max
Oscillating Multi-Too	bl
Speed	11,000-18,000 OPM
Oscillation Angle	3.6°
Bluetooth Speaker	
Bluetooth Range	100ft
Speaker	10W
Charger	90W
Batteries	12V, 2.0Ah

Includes

Drill Driver

Multi-Tool

Area Light

2pcs 2.0Ah PWRASSIST

Batterv

Specifications

2pcs PH2 Bits 2pcs Belt Clip 10pcs Sanding Paper Impact Driver Sanding Pad Bluetooth Speaker **Bi-Metal Plunge** Blade Speaker AUX Cable

PWRJUMP™ Charger



O BRUSHLESS

CB7434-21 PWRCORE 12[™] BRUSHLESS 6-TOOL COMBO KIT WITH **PWR**JUMP[™] CHARGER

Drill Driver Features

) HYBRID CHUCK™

Secure bit with chuck jaws or lock 1/4" hex bit without tightening) 1/2" SINGLE-SLEEVE, KEYLESS CHUCK For fast and easy bit changes

) LED LIGHT See work more clearly

Circular Saw Features

) 0-50° BEVEL CAPACITY Easily cut a variety of angles) 18 TOOTH CARBIDE BLADE For fast and clean cuts) ELECTRIC BRAKE Stops blade quickly

Right Angle Impact Driver Features

900 IN. POUNDS OF TORQUE The power to drive large fasteners and bolts) 90° ANGLED HEAD Compact head is ideal for tight spaces) HALO LIGHT™ 5X brighter light than common LEDs and reduces shadows

Oscillating Multi-Tool Features

) HALO LIGHT™ 5X more light than standard LED without shadows 3.6 DEGREE OSCILLATING ANGLE Faster cutting speeds) 6-SPEED AUTO SENSING Automatically adjusts based on your project

Inflator Features

HIGH PRESSURE MODE WITH AUTO SHUTOFF Quickly inflates tires, sports equipment, and more hands-free

) 12V TIRE INFLATOR WITH GAUGE Equipped with digital pressure gauge to set and view PSI in real time

) COMPACT SIZE or garage

Area Light Features

) LOCK ON For continuous use without having to hold trigger) 120 DEGREE PIVOTING HEAD To direct light in work place **HIGH/LOW LED SETTINGS**

Up to 400 lumens





Easy to store, and portable size perfect for the car

Specifications

Drill Driver	
Speed	0-450/0-1700 RPM
Torque	350 in. lbs
Chuck size	1/2" with Integrated 1/4" Hex for Holding Screw Bits
Torque settings	17+ Drill Mode
Length	7-1/8" (180mm)
Circular Saw	
Blade Size	5-1/2"
Speed	4200 RPM
Bevel Capacity	0-50°
Cutting Depth (90°)	1-5/8"
Cutting Depth (45°)	1-3/16"
Tool Size	10.9" x 6.5" x 9.6"
Right Angle Impact Dr	iver
Chuck	1/4" Hex Collet
Torque	900 In. lbs
Speed	0-2700 RPM, 0-3750 IPM
Length	12.3"
Tool Size	2.6" x 2.7" x 12.3"
Oscillating Multi-Tool	
Interface for Accessories	12 Pin OIS
Oscillating Angle	3.6°
Variable 6 Speed Dial	11000-18000 OPM
Length	11"
Inflator	
Pressure	Up to 160 PSI
Hose Length	28"
Tool Size	7-7/8" x 5-5/8" x 5-3/4"
Area Light	
LEDs	8
Lamp	400 Lumens Max

Includes

- Drill Driver Circular Saw **Right Angle Impact** Driver Multi Tool Cordless Inflator Area Light 2.0Ah Battery with USB 4.0Ah Battery with USB PWRJUMP™ Charger 2pcs Belt Clip
- 2pcs PH2 Bit 18T Thin Kerf Carbide Wood Cutting Blade Allen Key Vacuum Adapter 10pcs Sanding Paper Sanding Pad **Bi-Metal Plunge** Blade Presta Valve Adapter Sports Ball Needle Pinch Valve Adapter 2pcs Battery Jacket

PICORE 20

This lineup offers a range of tools, plus the benefits of our patented **PWR**CORE 20[™] lithium battery.

ADVANCED BATTERY TECHNOLOGY **PWRCORE 20**



Industry leading battery technology wraps each cell with cooling material to keep the battery powering on for 25% longer run time and 2X battery life.

5-MINUTE CHARGING auto**PWR**JUMP"



autoPWRJUMP™ boosts the battery from 0 to 25% power in 5 minutes giving enough power to blast through up to 100 screws. (Based on 2.0Ah battery)


MOBILE CHARGING PWRASSIST



Built-in USB port offers convenient, on-the-go charging for mobile devices.

WARRANTY



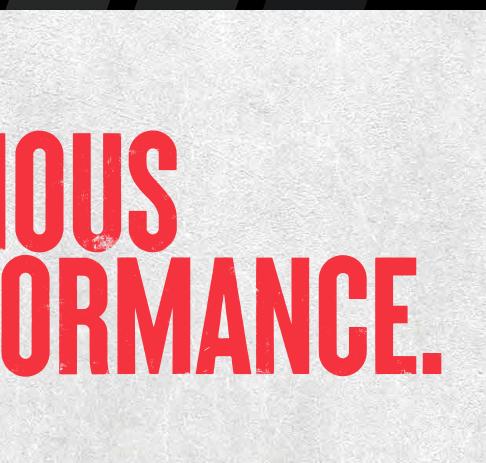



CR5413-1A PWRCORE 20[™] BRUSHLESS 20V 6-1/2'' CIRCULAR SAW KIT WITH 4.0 AH BATTERY AND auto**PWR**JUMP[™]CHARGER



Features

) DIGITAL BRUSHLESS MOTOR

Provides efficient, high-performance and extended tool life

) 0-50° BEVEL CAPACITY

Easily achieve the most commonly cut angles

QUICK CUTTING DEPTH ADJUSTMENT Make adjustments quickly for better accuracy) LED LIGHT W/PRELIGHT & AFTERFLOW See work clearly



Blac Spe Bev Cutt Cutt

/// PWRCORE 20" SYSTEM

Specifications

Blade	6-1/2" (165mm)/24T
Speed	5400 RPM
Bevel Capacity	0-50°
Cutting Depth at 90°	2-13/32" (61mm)
Cutting Depth at 45°	1-11/16" (43mm)
Arbor Size	5/8" (16mm)
Tool Size	12-5/8" x 10-3/8" x 6" (320 x 260 x 150mm)

Includes

Circular Saw 4.0Ah Battery auto**PWR**JUMP™ Charger **PWR**ASSIST™ USB Adapter Carbide Blade Allen Key Vacuum Adaptor 24T Ultra Thin Carbide Blade Allen Key Dust Extractor



BRUSHLESS

DL529302 PWRCORE 20[™] BRUSHLESS 20V 1/2'' DRILL DRIVER KIT WITH auto**PWR**JUMP[™]CHARGER

Features

) 1/2" SINGLE-SLEEVE, KEYLESS METAL CHUCK For fast, easy bit changes

) 17+ DRILL TORQUE ADJUSTMENT 17 settings for different driving applications + 1

drill mode) LED LIGHT WITH PRE-LIGHT AND AFTER-GLOW

See work clearly

) HIGH/LOW SPEED SETTINGS For maximum control and speed



ED- CHARGE MOBILE DEVICES







Features

) 1/2" SINGLE-SLEEVE, KEYLESS METAL CHUCK For fast, easy bit changes

) 17+ DRILL TORQUE ADJUSTMENT 17 settings for different driving applications + 1 drill

mode) LED LIGHT WITH PRE-LIGHT AND AFTER-GLOW

See work clearly

HIGH/LOW SPEED SETTINGS For maximum control and speed



Specifications

Specifications

1/2" Keyless Metal

0-480/0-1800 RPM

7-1/8" x 2-7/8" x

450 in.lbs

17+1

7-11/16

PH2

Belt Clip

Battery Jacket

Chuck

Torque

Speed

Tool Size

Includes

auto**PWR**.IUMP™

2" Double-end Bit

Drill Driver

2 0Ah **PWR**ASSIST™

Battery

Charger

Clutch Setting

Chuck	1/2" Keyless Metal
Torque	450 in.lbs
Speed	0-480/0-1800 RPM
Clutch Setting	17+1
Tool Size	7-1/8" x 2-7/8" x 7-11/16"

Includes

Drill Driver 2.0Ah Battery Standard Charge 2" Double-end Bit PH2 Belt Clip



26 www.skil.com

DL527502 PWRCORE 20[™] 20V 1/2" DRILL DRIVER KIT WITH **PWR**CORE 20[™] LITHIUM BATTERY

Features

) 1/2" SINGLE-SLEEVE, KEYLESS CHUCK For fast and easy bit changes

) LED LIGHT

Turns on with trigger, stays lit for 10 seconds after release

) CHOOSE YOUR SPEED SETTING

Set to high speed for efficiency and low speed for higher torque

) FORWARD/REVERSE LED INDICATOR Check driving direction at a glance

Specifications	
Chuck	1/2 in. Keyless with Auto Spindle Lock
Two Speed Settings	Low 0-420, High 0-1450 RPM
Torque Settings	17 Settings + Drill Mode
Torque	350 in. lbs
Light	LED
LED Indicator	Forward/Reverse
Length	7-7/16" (189 mm)

Includes

Drill Driver PH2 Bit 2.0Ah Batterv Belt Clip Standard Charger





LITHIUM 5Ah

O BRUSHLESS

Features

) THREE IN ONE reduce time and increase efficiency **) QUICK BIT CHANGES**) 24 POSITION CLUTCH Handles high torque applications

25% LONGER RUN TIME

Features

VERSATILITY AT IT'S BEST DIY tool for a variety of home projects 3-IN-1 MULTI-FUNCTION

Quickly transition between hammer, drill and screwdriver mode to save time **) CHOOSE YOUR SPEED SETTING** Set to high speed for better efficiency and low speed

for higher torque **) EASY BIT CHANGES** 1/2" keyless chuck with auto spindle lock allows for quick bit changes

HD529402 PWRCORE 20[™] BRUSHLESS 20V 1/2[™] HAMMER DRILL KIT WITH auto**PWR**JUMP[™]CHARGER

Features

For fast and easy bit changes) 17 TORQUE SETTINGS More settings for maximum control See work clearly 3-IN-1 MULTI-FUNCTION and driving modes

25% LONGER RUN TIME

) 1/2" SINGLE-SLEEVE, KEYLESS CHUCK

) LED LIGHT WITH PRE-LIGHT & AFTER-GLOW

Quickly transition between drill, hammer drill



E- CHARGE MOBILE DEVICES

Specifications

Chuck	1/2" Keyless Metal Ratcheting
Torque	450 in.lbs
Speed	0-480/0-1800 RPM
Impact Rate	0-7200/0-27000 IPM
Clutch Settings	17+1+1
Tool Size	7-5/8" x 2-7/8" x 7-11/16"

Includes

Hammer Drill 2.0Ah PWRASSIST™ Battery auto**PWR**.IUMPT Charger

2" Double-end Bit PH2 Belt Clip Battery Jacket

HD5295-1A PWRCORE 20[™] BRUSHLESS 20V 1/2[™] HEAVY DUTY HAMMER DRILL KIT WITH 5.0AH LITHIUM BATTERY AND auto**PWR**JUMP[™]CHARGER

Transition between hammer drill, drill, and drive modes to

1/2 inch single-sleeve, keyless metal ratcheting chuck allows for easy bit changes to keep your project going



E- CHARGE MOBILE DEVICES

Specifications

Chuck	1/2" Keyless Metal Ratcheting
Variable Speed Switch	Yes
No-Load Speed	0-550/0-2000 RPM
Max Impact Rate	0-8800/0-32000
Clutch Settings	24+1+1
LED light	Pre-Light and After-Glow

Includes

Heavy Duty Hammer Drill 5.0Ah Battery auto**PWR**JUMP™ Charge

Double-Ended PH2 Bit Belt Clip Side Handle

HD527802 PWRCORE 20™ 20V 1/2" HAMMER DRILL KIT WITH **PWR**CORE 20[™] 2.0AH LITHIUM BATTERY

From tightening screws to drilling into wood, metal and even concrete, this versatile hammer drill is the ideal

Specifications

Variable Speed	Low 0-420, High 0-1450 RPM
Impact Rate	0-6300/0-21750 BPM
Max Torque	350 in. lbs
Keyless Ratcheting Chuck	1/2"
Torque settings	17 plus Hammer Drill and Screwdriver Modes
Length	7-7/8" (201 mm)

Includes

Hammer Drill 20V 2.0Ah Battery Standard Charger

2" Double-end Bit PH2 Belt Clip



O BRUSHLESS

ID573902 PWRCORE 20[™] BRUSHLESS 20V 1/4[™] HEX IMPACT DRIVER WITH BATTERY AND auto**PWR**JUMP[™] CHARGER

Specifications

1/4" Hex Collet

0-1700 and 0-2700

0-2400/3400 IPM

5.8" x 2.8" x 8.0"

1800in lbs

RPM

5.8"

PH2 Bit

Belt Clip

Battery Jacket

Collet

Torque

Lenath

Driver

Batterv

Charger

Collet

Tool Size

2 Speeds

Impact Rate

Includes

1/4" Hex Impact

auto**PWR**JUMP™

2.0Ah PWRASSIST™

Features

VARIABLE SPEED CONTROL For maximum control and speed precision

) 2-SPEED TORQUE SETTING

Allows for a wide range of fastening

) LED LIGHT WITH PRE-LIGHT & AFTER-GLOW See work clearly

) CONTROL MODE

Eliminates screw "Cam Out" & "Cross Threading"



F CHARGE MOBILE DEVICES





VIBRATION REDUCTION SYSTEM (VRS) Innovative isolated motor design offers 90% less vibration, helping you work more comfortably. (compared to SKIL models without VRS feature)

POWERFUL PERFORMANCE

) CONSTANT SPEED TECHNOLOGY through harder cuts



OS593002 PWRCORE 20[™] 20V OSCILLATING MULTITOOL KIT WITH **PWR**CORE 20[™] 2.0AH LITHIUM BATTERY

Features

ERGONOMIC DESIGN Balanced and easy to handle LED LIGHT See work more clearly **VARIABLE SPEED DIAL**

Choose the speed based on your project

ID572702 PWRCORE 20[™] 20V 1/4[™] HEX IMPACT DRIVER KIT WITH **PWR**CORE 20[™] LITHIUM BATTERY

Features

) 1/4" HEX COLLET Fast, easy bit changes

) LED LIGHT

Turns on with trigger, stays lit for seconds after release

VARIABLE SPEED CONTROL

Full control for a variety of projects

) FORWARD/REVERSE LED INDICATOR Check driving direction at a glance

0-2500 RPM Speed Trigger Variable Speed Torque 1,100 in. lbs LED Indicators Forward/Reverse Light LED Length 6" (152 mm)

1/4 inch Hex

Includes

Specifications

Impact Driver PH2 Bit 2.0Ah Battery Belt Clip Standard Charger



IW5739-1A PWRCORE 20[™] BRUSHLESS 20V 1/2" IMPACT WRENCH KIT WITH 5.0AH BATTERY AND auto**PWR**JUMP[™]CHARGER

Features

) POWERFUL PERFORMANCE

The digital brushless motor provides efficient, highperformance power for use on lug nuts and tough automotive bolts

) THREE SPEED SETTINGS

Choose between High, Low, and Reverse Control Mode) REVERSE CONTROL MODE

Stops rotations and impact once the fastener is loosened



Anvil with Friction Ring	1/2"
Torque	200 ft.lbs
Speed	0-2100/0-2400 RPM
Impact Rate	0-2800/0-3200 IPM
Tool Size	6.2" x 2.8"x 8.0" (158 x 72 x 202 mm)

Includes

Specifications

Impact Wrench 5.0Ah Battery auto**PWR**JUMP™ Charger Belt Clip **PWR**ASSIST™ USB Adapter





Features

) DIGITAL BRUSHLESS MOTOR masonry

) 4-MODE SELECTOR Transition between drill, hammer drill, chisel, and chisel alignment settings, reducing time and increasing efficiency **) QUICK BIT CHANGES**


keep your project going







O BRUSHLESS



OS5937-10 PWRCORE 20[™] BRUSHLESS 20V OSCILLATING MULTITOOL WITH BATTERY AND auto**PWR**JUMP[™]CHARGER

The digital brushless motor provides efficient, high-performance power for longer tool life.

Innovative SKIL brushless motor communicates with the PWRCore 20[™] battery to maintain consistent speed

CHARGE MOBILE DEVICES

Specifications

Interface for Accessories	12 Pin OIS
Oscillating Angle:	3.6°
Variable 6 Speed Dial	11,000-17,000 OPM
Light	LED
Length	12-1/6" (309mm)

Includes

Multi-Tool 2.0Ah PWRASSIST™ Battery auto**PWR**JUMP^T Charger 35 pc Sanding Paper Sanding Pad

Bi-Metal Blade HCS Wood Blade HCS Segment Blade **Rigid Scraper** Accessories Case Battery Jacket

3.6 DEGREE OSCILLATING ANGLE

High performance cutting, sanding, and scraping

Specifications

Interface	12 Pin OIS for Accessories
Oscillating Angle	3.6 Degrees
Variable 6 Speed Dial	11,000-16,000 OPM
Light	LED
Length	12-1/2" (318 mm)

Includes

Oscillating Multi-Tool 2.0Ah Battery Standard Charger Sanding Paper (14: 60 grit, 14: 120 grit)

Sanding Pad HCS Wood Blade HCS Segment Blade Rigid Scrape Hex Kev

RH1704-1A PWRCORE 20[™] BRUSHLESS 20V 7/8" ROTARY HAMMER KIT WITH 5.0AH BATTERY AND auto**PWR**JUMP[™]CHARGER

Provides efficient, high-performance power when drilling through tough surfaces like brick, concrete, and other

SDS Plus Chuck allows for easy and secure bit changes to

Specifications

Chuck	SDS Plus
Impact Energy	1.5 ft.lbs / 2.0J
Speed	0-1400 RPM
Impact Rate	0-4500 IPM
Drilling Capacity	7/8"
Tool Size	11.18" x 3.15" x 7.80" (284 x 80 x 198mm)

Includes

Rotary Hammer 5.0Ah Battery Depth Rod Side Handle

Auto **PWR**JUMP™ Charger **PWR**ASSIST™ USB Adapter



RH170202 PWRCORE 20™ 20V ROTARY HAMMER KIT WITH **PWR**CORE 20[™] LITHIUM BATTERY

Features

) MULTI-FUNCTION CHUCK

Compatible with SDS Plus drilling bit and 1/4" hex bit **) DIRECTION INDICATORS**

Forward/reverse LED indicator to determine driving direction

) THREE TOOLS IN ONE

Combines hammer drill, drill and screwdriver into one tool

) POWERFUL PERFORMANCE

Hammers through materials like concrete and masonry) LED LIGHT

Turns on with trigger, stays lit for 10 seconds after release

Specifications

Speed	0-900 RPM
Impact Rate	0-5000 BPM
Impact Force	0.7 ft. lbs (1J)
Multi-function Chuck	For SDS, SDS+ and 1/4" Hex Bits
Solid Bit Capacity	1/2"

Includes

Rotary Hammer 2.0Ah Battery Standard Charger 1x75mm Bit Holder



Features

) VARIABLE SWITCH WITH BRAKE) 4-STAGE ORBITAL FUNCTION strokes per minute

) TOOL-FREE BLADE CLAMP Easily replace and secure saw blades in seconds) TOOL-FREE BEVEL ADJUSTMENT Quickly adjust the shoe for a perfectly angled cut) LED LIGHT Turns on with trigger, stays lit for 10 seconds after release



CR540602 PWRCORF 20™20V 6-1/2'' CIRCUI AR SAW KIT WITH **PWR**CORE 20[™] LITHIUM BATTERY

Features

) BEVEL ADJUSTMENT 0-50 degree bevel cut capacity) DEPTH ADJUSTMENT LEVER For guick depth adjustment) LED LIGHT See the cut line more clearly **) SAW LINE VISOR** Helps keep the cut straight) LOCK-OFF LEVER For enhanced safety

Specifications

Speed	4,500 RPM
Bevel Capacity	Up to 50 Degrees
Max Depth of Cut	2-1/8" at 90 Degrees
Blade Type	Thin-Kerf, 24-Tooth, Carbide-Tipped
Visor	Saw Line
Light	LED

Includes

Circular Saw 2.0Ah Battery 6-1/2" Blade

Specifications

Standard Charger Allen Kev Vacuum Adapter









Features

Features

perform smooth clean cuts

VARIABLE SPEED TRIGGER Provides maximum precision and control **) DUAL LED LIGHTS WITH PRE-LIGHT**

AND AFTER-GLOW vertical board



CHARGE MOBILE DEVICES

JS820202 PWRCORE 20[™] BRUSHLESS 20V JIGSAW KIT WITH BATTERY AND auto**PWR** JUMP[™] CHARGER

Features

- **VARIABLE TRIGGER WITH BRAKE**
- Allows for maximum control and a precise finish
-) TOOL-LESS BEVEL ADJUSTMENT
- Quickly adjusts for angled cutting
-) 4 STAGE ORBITAL FUNCTION
- Smooth cutting ability across different materials and applications with up to 3,000 strokes per minute
-) TOOL-FREE BLADE CLAMP
- For quick and secure blade changes



CHARGE MOBILE DEVICES

Blade Compatibility	U-Shank and T-Shank Blades
Blade Stroke	1"
Speed	0-3000 SPM
Bevel Adjustment	Up to 45 Degrees
Tool Size	8-3/8" x 2-9/10" x 8-1/5"

Includes

Jig Saw Wood Blade 2.0Ah PWRASSIST™ Metal Blade Batterv Battery Jacket auto**PWR**JUMP^{TI} Charger

BRUSHLESS

JS820302 PWRCORE 20[™] 20V 7/8'' STROKE LENGTH ORBITAL JIGSAW KIT WITH **PWR**CORE 20[™] LITHIUM BATTERY

Maximum control for cleaner cuts on various projects

High cutting efficiency for different materials, up to 2,800

Specifications

Speed	0-2800 SPM
Stroke	7/8"
Blade Compatibility	U-Shank and T-Shank
Orbital Settings	3
Shoe	Pivoting
Length	8-3/8" (213 mm)

Includes

Jig Saw 2.0Ah Battery Standard Charger Wood Blade Metal Blade

RS5884-1A PWRCORE 20[™] BRUSHLESS 20V RECIPROCATING SAW KIT WITH 4.0AH BATTERY AND auto**PWR**JUMP[™] CHARGER

POWERFUL PERFORMANCE

The digital brushless motor provides efficient, highperformance power for longer tool life

CONTROL YOUR CUTS

Switch between linear mode for cleaner cuts and orbital mode for more aggressive cuts

) PIVOTING ADJUSTABLE SHOE

Extend the blade life and control the depth of cut

) TOOL-LESS BLADE CHANGES

Spindle lock allows for quick and secure blade changes



CHARGE MOBILE DEVICES

Specifications

Speed	0-3000 SPM
Stroke Distance	1-1/8" (29mm)
Tool Size	17" x 3.75" x 6.5" (430 x 96 x 165mm)
Weight	6.28 lbs. (2.85kg)

Includes

Reciprocating Saw 4.0Ah Battery without USB auto**PWR**JUMP™ Charger **PWR**ASSIST[™] USB Adapter Wood Cutting Blade

RS5825B-10 PWRCORE 20[™] BRUSHLESS 20V COMPACT RECIPROCATING SAW WITH BATTERY AND auto**PWR**JUMP[™] CHARGER

COUNTERBALANCE GEAR BOX & PIVOTING SHOE

Maximum precision and control with reduced vibration to

Top LED illuminates an upper surface when cutting pipes while lower LED casts a vertical line when cutting walls or

Specifications

Stroke Length	1"
SPM	0-3000
Tool Size	13.6" x 2.9" x 6" (345 x 73 x 153mm)
Weight	5.0 lbs. (2.27kg)

Includes

Compact Reciprocating Saw 2.0Ah Battery with USB auto**PWR**JUMP™ Charger Wood Cutting Blade Battery Jacket

RS582902 PWRCORE 20[™] 20V RECIPROCATING SAW KIT WITH BATTERY AND CHARGER



Features

) TOOL-LESS BLADE CHANGE Easy blade changes ADJUSTABLE PIVOTING SHOE Greater depth control) UP TO 3000 SPM Fast, efficient cutting **VARIABLE SPEED TRIGGER** Precision speed control

Specifications

Speed	0-3000 SPM
Stroke Length	1 Inch (25 mm)
Trigger	Variable Speed
Blade Change	Tool-Less
Shoe	Pivoting
Length	15-3/8" (390 mm)

Includes

Specifications

Wheel Diameter

Speed

Tool Size

Includes

Angle Grinder

5.0Ah Battery

Grinding Disc

Grinding Guard

PWRASSIST™

USB Adapter

Wrench

auto**PWR**JUMP™ Charger

Wrench Storage Handle

Reciprocating Saw Wood Cutting Blade 2.0 Ah Battery Allen Wrench Standard Charge

8500 RPM


4-1/2" (115mm)

12-1/4" x 2-7/8" x 4"

(311 x 73 x 102mm)



O BRUSHLESS



Features



SR6604B-10 PWRCORE 20™5" RANDOM ORBITAL SANDER WITH BATTERY AND CHARGER

Features

POWERFUL MOTOR For a variety of sanding applications with 7,000-11,000 OPM **VARIABLE SPEED CONTROL** and surfaces

REDUCES DUST) EASY SANDPAPER CHANGING sanding paper changes

For extended tool life

Features

PRECISION PLANING Depth of cut in increments of 1/64th) CLEARS DEBRIS free of sawdust **) BUILT-IN WRENCH STORAGE**



AG2907-1A PWRCORE 20[™] BRUSHLESS 20V 4-1/2" ANGLE GRINDER KIT WITH 5.0AH BATTERY AND auto**PWR**JUMP[™]CHARGER

Features

POWERFUL PERFORMANCE

The digital brushless motor provides efficient, highperformance power for cutting through strong materials like steel, ceramic, and more

SAFETY FIRST

Move through projects faster with tool-less guard adiustment

) ONBOARD WRENCH STORAGE

Conveniently located in side handle for easy access



CHARGE MOBILE DEVICES



O BRUSHLESS

AG290202 PWRCORE 20[™] 20V 4-1/2[™] ANGLE GRINDER K WITH **PWR**CORE 20[™] LITHIUM BATTERY

Features

) DUAL FUNCTION LOCK-ON SWITCH Prevents accidental start up and locks on for prolonged use

TOOL-FREE GUARD ADJUSTMENT

One handed release to quickly adjust position of guard

) ENHANCED CONTROL

An easier and safer, soft start

3 POSITIONS FOR SIDE HANDLE

Choose the position that works best for the project

) ONBOARD WRENCH STORAGE Conveniently located in side handle for easy access

Specifications

Speed	8500 RPM
Wheel Diameter	4-1/2" (115 mm)
Adjustable Guard	Tool-Free
Wrench	Integrated in Side Handle
Side Handle Positions	3
Length	11-1/8" (285 mm)

Includes

Angle Grinder Wrench Storage 2.0Ah Batterv Handle Standard Charger Grinding Guard Grinding Disc Wrench

ίT			

_	
-	
-	· P S SKILT
-	1





BRUSHLESS

SR660302 PWRCORE 20[™] BRUSHLESS 20V 5" RANDOM ORBITAL SANDER WITH BATTERY AND auto**PWR**JUMP[™]CHARGER

) DIGITAL BRUSHLESS MOTOR

Provides high-performance and extended tool life

BANDOM ORBIT FUNCTION

Vibrates and spins simultaneously reducing noticeable swirls and scratches

For Maximum control and speed precision

E CHARGE MOBILE DEVICES

Specifications

Speed	7000-11000 OPM
Pad Diameter	5"
Dust Box	With Micro-Filter
Dust Port	Fits 1-1/4" (32 mm) Vacuum Attachment
Paper Attachment Type	Hook & Loop
Tool Size	6.3" x 5.9" x 8.4" (160 x 151 x 213mm)

Includes

Random Orbital Sander 2.0Ah PWRASSIST™ Battery autoPWRJump™ Charger 5pc Sanding Paper Dust Box

Provides maximum control for a variety of projects

Microfiltration canister keeps dust contained A hook and loop system allows for simple and quick

) DUST SEALED POWER SWITCH

Specifications

Pad Size	5" Diameter
Speed	7000-11000 RPM
Orbit Diameter	1/8" (3mm)
Paper Attachment	Hook & Loop
Variable Speed	6 Speed Settings
Tool Size	5.7" x 5.9" x 6.3" (145 x 150 x 160mm)
Tool Weight	2.6 lbs. (1.2kg)

Includes

Random Orbital Sander 2.0Ah Battery Standard Charge (3) Sanding Paper Dust Canister

PL5938-1A PWRCORE 20[™] BRUSHLESS 20V 3-1/4" PLANER KIT WITH 4.0AH BATTERY AND auto**PWR**JUMP[™] CHARGER

Dual left or right chip exhaust keeps your workspace

For easy and secure access

Specifications

Speed	14,000 RPM
Planing Width	3-1/4" (82mm)
Single Pass Depth Capacity	5/64" (2mm)
Depth Adjustment	1/128" (0.2mm)
Max Rabbet Depth	5/16" (8mm)
Tool Size	11.56" x 6.57" x 7.38" (294 x 167 x 187mm)
Tool Weight	5.12 lbs (2.32kg)

Includes

Planer 4.0Ah Batterv Auto **PWR**JUMP™ Charger Parallel Guide Dust Bag

Spanner Rabbet Fence **PWR**ASSIST™ USB Adapte



BRUSHLESS

JB4712B-00 PWRCORE 20™ BRUSHLESS 20V JOBSITE BLOWER, TOOL ONLY

Features

VARIABLE TRIGGER AND SPEED LOCK Provides greater control based on the application and reduces user fatigue

3-SPEED SETTINGS

Delivers maximum output of 110 CFM at 180 MPH **) COMPACT POWER**

Provides power in a lightweight design

) RUBBER NOZZLE

Protects work surfaces and increases durability

25% LONGER RUN TIME 5-MINUTE CHARGING

CHARGE MOBILE DEVICES

Specifications

Air Volume	110 CFM
Air Speed	180 MPH
Speed Setting	High, Medium, Low
Tool Size	14.6" x 2.9" x 9.6" (370 x 73 x 243mm)

Includes

Jobsite Blower Rubber Extension Nozzle Inflator/Deflator Adapter

Specifications



TOOL ONLY

Features

) HIGH VOLUME MODE mattresses inflate and deflate easily HIGH PRESSURE MODE

) DIGITAL PRESSURE GAUGE two modes

) LED WORK LIGHT See your work clearly with a bright LED **) DUAL FUNCTION INFLATOR** This combined air inflator/deflator is powered by SKIL PWRCore 20[™] Lithium Battery (sold separately)



LH5534-00 PWRCORE 20[™] 20V FLOOD LIGHT. TOOL ONLY

Features

) DUAL-PANEL FLOOD LIGHT

Ultra-bright LED panels in this work light illuminate large work areas with up to 1800 lumens for greater visibility

) ROTATING LED PANELS

Each panel rotates independently to illuminate multiple surfaces at once

) ILLUMINATION CONTROL

Choose from three light settings depending on the task at hand: high, low, or single panel

) LOW BATTERY WARNING

Light dims twice when the battery is low, so you'll never get caught in the dark

AUTOMATIC SHUT OFF

Lights power off automatically when panels are closed

Three Settings 1800, 900, or Single Panel 450 Lumens Up to 3.5 Hours on Runtime High Setting with SKII 20V 4.0Ah Battery **Pivoting Angles** Lower Panel 0-170° Upper Panel 0-270° Pulse Indication Low Batterv Mounting Thread 1/4" -20 UNC Tool Size 8.54" x 8.23" x 6.9" (217 x 209 x 175mm) Weight 3.17 lbs. (1.44kg)

PWR 🖸 ntl SKIL

Features

) autoPWRJUMP™ CHARGING Charges in just 5 minutes*, or 100% battery in 30 minutes > PWBCOBE™ 20 SYSTEM

Pairs with SKIL 20V Lithium Batteries) LED CHARGING INDICATOR Indicates charging status

*Based on 2.0 Ah battery



R05028-00 PWRCORE 20[™] BLUETOOTH 20V SPEAKER. TOOL ONLY

Features

BLUETOOTH SPEAKER

Portable and wireless to take with you wherever you go

) BASS BOOSTER

Dual passive bass radiators for quality sound) PHONE CRADLE

A helpful spot for your phone while you listen

) CHARGE OTHER DEVICES

Stay powered up with the integrated USB port.

AUXILIARY INPUT

Optional connection for your phone or MP3 player

Specifications

Includes

Flood Light

Voltage	20V
Bluetooth Connec- tivity	Up to 100ft (30m)
Speaker	2.5", 10W
USB Port	2.1A 5V
Auxiliary Input	3.5 mm
Unit Size	4-3/4" x 7" x 5" (120 x 178 x 127 mm

Includes

20V Speaker 3.5mm Auxiliary Cord



) FUEL GAUGE power is left

Features

IF5940-00 PWRCORE 20[™] 20V DUAL FUNCTION INFLATOR,

With included high volume hose, large inflatables like air

Preset the pressure for an accurate and efficient way to automatically fill a variety of tires hands-free

Digital readout and control buttons allow you to choose

Specifications

Pressure	Up to 160 PSI
Air Volume	14.4CFM
	(Low Pressure)
Hose Length	26"
Vehicle Power	12V
Tool Size	12" x 8-3/8" x 5-1/4"

Includes

Dual Function Inflator Presta Valve Adapter Sports Ball Needle Pinch Valve Adapter High Volume Hose

QC536001 PWRCORE 20[™] auto**PWR**JUMP[™] CHARGER

Specifications

Power Cord Length	6 ft
Size	6" x 6.9" x 2.4"
Charging Current	6 A
Compatibility	All SKIL 20V Batteries

Includes

auto**PWR**JUMP™ Charger

BY519702 PWRCORE 20[™] LITHIUM 2.0AH 20V BATTERY WITH **PWR**ASSIST[™] MOBILE CHARGING

> PWRCORE 20[™] LITHIUM TECHNOLOGY

Industry leading battery technology, 25% longer run time and 2X longer battery life > PWRASSIST™ MOBILE CHARGING Utilize USB port on the battery to charge

LED charge status indicators show how much

Specifications

Battery Type	Rechargeable Lithium-Ion
Voltage	20V
Capacity	2.0Ah
USB Port	5V, 1.0A
Compatibility	All SKIL 20V Tools
Fuel Gauge	Green LED
Charging	Only with SKIL 20V Charger

Includes

2.0Ah Batterv Battery Jacket

BY519603 20V 5.0AH **PWR**CORE 20™ LITHIUM BATTERY



Features > PWRCORE 20[™] LITHIUM TECHNOLOGY

Industry leading technology keeps the battery cool and powering on for 25% longer run time

) 2X BATTERY LIFE Patented battery technology extends the battery life 2X longer

Specifications

Battery Type	Rechargeable Lithium-Ion
Voltage	20V
Capacity	5.0Ah
Compatibility	All SKIL 20V Tools
Fuel Gauge	Green LED
Charging	Only with SKIL 20V Charger

Includes

5.0Ah Battery



Drill Driver Features

) 1/2" SINGLE-SLEEVE, KEYLESS METAL CHUCK For fast, easy bit changes) 17+ DRILL TORQUE ADJUSTMENT 17 settings for dierent driving applications + 1 drill mode) LED LIGHT WITH PRE-LIGHT AND AFTER-GLOW See work clearly HIGH/LOW SPEED SETTINGS For maximum control and speed

Impact Driver Features

VARIABLE SPEED CONTROL For maximum control and speed precision) 2-SPEED TORQUE SETTING Allows for a wide range of fastening) LED LIGHT WITH PRE-LIGHT & AFTER-GLOW See work clearly) CONTROL MODE Eliminates screw "Cam Out" & "Cross Threading"



CB7475-1A PWRCORE 20[™] BRUSHLESS 20V DRILL DRIVER & **CIRCULAR SAW KIT WITH WITH 4.0AH BATTERY**

Drill Driver Features

For fast, easy bit changes See work clearly) HIGH/LOW SPEED SETTINGS For maximum control and speed) DIGITAL BRUSHLESS MOTOR


Circular Saw Features

tool life) 0-50° BEVEL CAPACITY

Easily achieve the most commonly cut angles **QUICK CUTTING DEPTH ADJUSTMENT** Make adjustments quickly for better accuracy



CHARGE MOBILE DEVICES

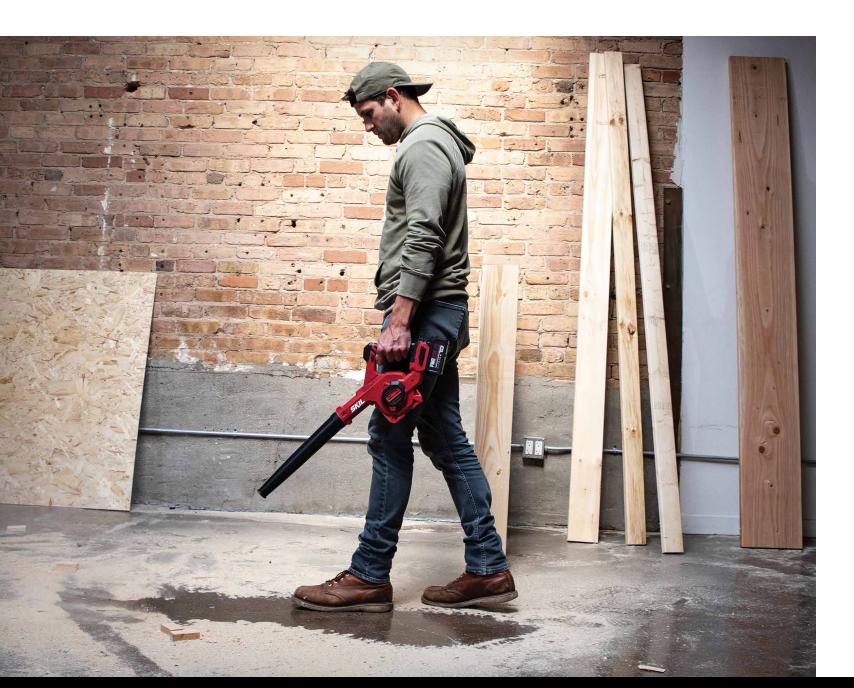







CB743701 PWRCORE 20[™] BRUSHLESS 20V DRILL DRIVER & IMPACT DRIVER KIT WITH auto**PWR**JUMP[™] CHARGER

Specifications

Drill Driver	
Chuck	1/2" Keyless Metal
Torque	450 in.lbs
Speed	0-480/0-1800 RPM
Clutch Setting	17+1
Tool Size	7-1/8" x 2-7/8" x 7-11/16"
Impact Driver	
Collet	
Oblict	1/4" Hex Collet
Torque	1/4" Hex Collet 1800in. lbs
Torque	1800in. lbs
Torque 2 Speeds	1800in. lbs 0-1700 and 0-2700 RPM

Includes

Drill Driver Impact Driver 2.0Ah PWRASSIST™ Batterv auto**PWR**JUMP^{TI} Charge

2" Double-end Bit PH2 PH2 Bit 2pcs Belt Clip Battery Jacket

) 1/2" SINGLE-SLEEVE, KEYLESS METAL CHUCK) 17+ DRILL TORQUE ADJUSTMENT 17 settings for dierent driving applications + 1 drill mode) LED LIGHT WITH PRE-LIGHT AND AFTER-GLOW

Provides high-performance and extended tool life

) DIGITAL BRUSHLESS MOTOR Provides efficient, high-performance and extended

Specifications

Dril	D	riv

Drill Driver	
Chuck	1/2" Keyless Metal
Torque	450 in.lbs
Speed	0-480/0-1800 RPM
Clutch Setting	17+1
Tool Size	7-1/8" x 2-7/8" x 7-11/16"
Circular Saw	
Blade	6-1/2" (165mm)/24T
Speed	5400 RPM
Bevel Capacity	0-50°
Cutting Depth at 90°	2-13/32" (61mm)
Cutting Depth at 45°	1-11/16" (43mm)
Arbor Size	5/8" (16mm)
Tool Size	12-5/8" x 10-3/8" x 6" (320 x 260 x 150mm)

Includes

Drill Driver Circular Saw 4.0Ah Battery auto**PWR**JUMP™ Charger **PWR**ASSISTTM USB Adapter

Belt Clip PH2 Bit Carbide Blade Allen Key Vacuum Adaptor



OBRUSHLESS



CB7488B-20 PWRCORE 20[™] BRUSHLESS 20V 4-TOOL COMBO KIT WITH auto**PWR**JUMP[™]CHARGER

Drill Driver Features

) 1/2" SINGLE-SLEEVE, KEYLESS METAL CHUCK **Drill Driver**

Specifications

Chuck

Pivot Hinge

Charger

PH2

For fast, easy bit changes) 17+ DRILL TORQUE ADJUSTMENT

17 settings for dierent driving applications + 1 drill mode

Circular Saw Features) DIGITAL BRUSHLESS MOTOR

Provides efficient, high-performance and extended tool life

0-50° BEVEL CAPACITY

Easily achieve the most commonly cut angles

Reciprocating Saw Features

POWERFUL PERFORMANCE The digital brushless motor provides efficient, highperformance power for longer tool life

CONTROL YOUR CUTS

Switch between linear mode for cleaner cuts and orbital mode for more aggressive cuts

Area Light Features

) 120 DEGREE ROTATION Allows for projection in multiple directions



E CHARGE MOBILE DEVICES

	Torque	450 in.lbs
e	Speed	0-480/0-1800 RPM
	Circular Saw	
	Blade	6-1/2" (165mm)/24T
	Speed	5400 RPM
	Bevel Capacity	0-50°
Reciprocating Saw		
	Speed	0-3000 SPM
	Speed Stroke Distance	0-3000 SPM 1-1/8" (29mm)
	•	
	Stroke Distance	1-1/8" (29mm) 17" x 3.75" x 6.5"
	Stroke Distance Tool Size	1-1/8" (29mm) 17" x 3.75" x 6.5"

1/2" Kevless Metal

Includes Drill Driver Belt Clip Wood Cutting Blade Reciprocating Saw Circular Saw 24T Ultra Thin Area Light Carbide Wood 2.0Ah Battery Cutting Blade with USB

120°

Allen Key 4.0Ah Battery Dust Port Auto **PWR**JUMP™ Battery Jacket Soft Bag 2" Double-end Bit

CB7440-21 PWRCORE 20[™] BRUSHLESS 20V 4-TOOL COMBO KIT WITH auto**PWR**JUMP[™]CHARGER

Drill Driver Features

) 1/2" SINGLE-SLEEVE, KEYLESS METAL CHUCK For fast, easy bit changes

) 17+ DRILL TORQUE ADJUSTMENT 17 settings for dierent driving applications + 1 drill mode

Circular Saw Features

) DIGITAL BRUSHLESS MOTOR Provides efficient, high-performance and extended

tool life) 0-50° BEVEL CAPACITY

Easily achieve the most commonly cut angles

Multi Tool Features

VIBRATION REDUCTION SYSTEM (VRS) Innovative isolated motor design offers 90% less vibration, helping you work more comfortably. (compared to SKIL models without VRS feature)

Bluetooth Speaker Features

) BLUETOOTH SPEAKER

Portable and wireless to take with you wherever you go) BASS BOOSTER

Dual passive bass radiators for quality sound



Specifications		
Drill Driver		
Chuck	1/2" Keyless Metal	
Torque	450 in.lbs	
Speed	0-480/0-1800 RPM	
Circular Saw		
Blade	6-1/2" (165mm)/24T	
Speed	5400 RPM	
Bevel Capacity	0-50°	
Multi Tool		
Interface for Accessories	12 Pin OIS	
Oscillating Angle:	3.6°	
Variable 6 Speed Dial	11,000-17,000 OPM	
Bluetooth Speaker		
Voltage	20V	
Bluetooth Connectivity	Up to 100ft (30m)	
Speaker	2.5", 10W	

Belt Clip Circular Saw 2 0Ah Batten 4 0Ah Battery autoPWR II IMPT 2" Double-End Bit



CB7443-21 PWRCORE 20[™] BRUSHLESS 20V 6-TOOL COMBO KIT WITH 4.0AH BATTERY AND auto**PWR**JUMP[™] CHARGER

Drill Driver Features

) 1/2" SINGLE-SLEEVE, KEYLESS METAL CHUCK For fast, easy bit changes) 17+ DRILL TORQUE ADJUSTMENT 17 settings for dierent driving applications + 1 drill mode LED LIGHT WITH PRE-LIGHT AND AFTER-GLOW See work clearly

Reciprocating Saw Features

) POWERFUL PERFORMANCE performance power for longer tool life **) CONTROL YOUR CUTS** mode for more aggressive cuts **) PIVOTING ADJUSTABLE SHOE**

Multi Tool Features

POWERFUL PERFORMANCE performance power for longer tool life.

VIBRATION REDUCTION SYSTEM (VRS) Innovative isolated motor design offers 90% less vibration, helping you work more comfortably. (compared to SKIL models without VRS feature)

through harder cuts

Bluetooth Speaker Features

) BLUETOOTH SPEAKER Portable and wireless to take with you wherever you go) BASS BOOSTER Dual passive bass radiators for quality sound) PHONE CRADLE A helpful spot for your phone while you listen

) RANDOM ORBIT FUNCTION swirls and scratches) DIAL SPEED CONTROL

For Maximum control and speed precision

Spotlight Features

) 104° PIVOTING HEAD Shine the light in dierent directions **) 2-STEP ILLUMINATION CONTROL** 150 or 300 lumens based on the project) HANDS-FREE USE Hanging hook on back

RUN TIME	5-MINUTE CHARGING
	BILE DEVICES

38 www.skil.com

OBRUSHLESS

Includes Drill Driver

Multi-Tool

Speaker

Charger

PH2

24T Thin Carbide Wood Cutting Blade Allen Key Dust Port 10 pc Sanding Paper **Bi-Metal Blade** Sanding Pad Battery Jacket 3.5mm AUX Cord

The digital brushless motor provides efficient, high-

Switch between linear mode for cleaner cuts and orbital

Extend the blade life and control the depth of cut

The digital brushless motor provides efficient, high-

) CONSTANT SPEED TECHNOLOGY Innovative SKIL brushless motor communicates with the PWRCore 20[™] battery to maintain consistent speed

Random Orbital Sander Features

) DIGITAL BRUSHLESS MOTOR Provides high-performance and extended tool life

Vibrates and spins simultaneously reducing noticeable



Specifications

Drill Driver Chuck 1/2" Keyless Metal Torque 450 in.lbs Speed 0-480/0-1800 RPM Clutch Setting 17+1 Tool Size 7-1/8" x 2-7/8" x 7-11/16" Reciprocating Saw Speed Speed 0-3000 SPM Stroke Distance 1-1/8" (29mm) Tool Size 17" x 3.75" x 6.5" (430 x 96 x 165mm) Weight 6.28 lbs. (2.85kg) Multi Tool (430 x 96 x 165mm) Weight 6.28 lbs. (2.85kg) Multi Tool 12 Pin OIS Oscillating Angle: 3.6° Variable 6 Speed Dial 11,000-17,000 OPM Light LED Length 12-1/6" (309mm) Bluetooth Connectivity Up to 100ft (30m) Speaker 2.5", 10W USB Port 2.1A 5V Auxiliary Input 3.5 mm Unit Size 7000-11000 OPM Speed 7000-11000 OPM Pad Diameter 5" Dust Box With Micro-Filter Dust Port	opeomodiens		
Torque 450 in.lbs Speed 0-480/0-1800 RPM Clutch Setting 17+1 Tool Size 7-1/8" x 2-7/8" x 7-11/16" Reciprocating Saw Speed Speed 0-3000 SPM Stroke Distance 1-1/8" (29mm) Tool Size 17" x 3.75" x 6.5" (430 x 96 x 165mm) Weight 6.28 lbs. (2.85kg) Multi Tool	Drill Driver		
Speed 0-480/0-1800 RPM Clutch Setting 17+1 Tool Size 7-1/8" x 2-7/8" x 7-11/16" Reciprocating Saw Speed Speed 0-3000 SPM Stroke Distance 1-1/8" (29mm) Tool Size 17" x 3.75" x 6.5" (430 x 96 x 165mm) Weight 6.28 lbs. (2.85kg) Multi Tool Interface for Accessories Oscillating Angle: 3.6° Variable 6 Speed Dial 11,000-17,000 OPM Light LED Length 12-1/6" (309mm) Bluetooth Speaker 2.0V Speaker 2.0V Bluetooth Connectivity Up to 100ft (30m) Speaker 2.5", 10W USB Port 2.1A 5V Auxiliary Input 3.5 mm Unit Size 7000-11000 OPM Speed 7000-11000 OPM Pad Diameter 5" Dust Box With Micro-Filter Dust Box With Micro-Filter Dust Box With Micro-Filter Dust Box With Micro-Filter	Chuck	1/2" Keyless Metal	
Clutch Setting 17+1 Tool Size 7-1/8" x 2-7/8" x 7-11/16" Reciprocating Saw Speed Speed 0-3000 SPM Stroke Distance 1-1/8" (29mm) Tool Size 17" x 3.75" x 6.5" (430 x 96 x 165mm) Weight 6.28 lbs. (2.85kg) Multi Tool 12 Pin OIS Accessories 200 Oscillating Angle: 3.6° Variable 6 Speed Dial 11,000-17,000 OPM Light LED Length 12-1/6" (309mm) Bluetooth Speaker 2.0V Bluetooth Connectivity Up to 100ft (30m) Speaker 2.5", 10W USB Port 2.1A 5V Auxiliary Input 3.5 mm Unit Size 4-3/4" x 7" x 5" (120 x 178 x 127 mm) Speed 7000-11000 OPM Pad Diameter 5" Dust Box With Micro-Filter Dust Box With Micro-Filter Dust Box With Micro-Filter Dust Box With Micro-Filter Dust Box Son" x 5.9" x 8.4" (Torque	450 in.lbs	
Tool Size 7-1/8" x 2-7/8" x 7-11/16" Reciprocating Saw Speed 0-3000 SPM Stroke Distance 1-1/8" (29mm) Tool Size 17" x 3.75" x 6.5" (430 x 96 x 165mm) Weight 6.28 lbs. (2.85kg) Multi Tool Interface for Accessories Oscillating Angle: 3.6° Variable 6 Speed Dial 11,000-17,000 OPM Light LED Length 12-1/6" (309mm) Bluetooth Speaker 2.5", 10W Voltage 20V Bluetooth Connectivity Up to 100ft (30m) Speaker 2.5", 10W USB Port 2.1A 5V Auxiliary Input 3.5 mm Unit Size 4-3/4" x 7" x 5" (120 x 178 x 127 mm) Bandom Orbital Sander Speed Speed 7000-11000 OPM Pad Diameter 5" Dust Box With Micro-Filter Dust Box With Micro-Filter Dust Box With Micro-Filter Dust Port Fits 1-1/4" (32 mm), Vacuum Attachment Type 100 Size	Speed	0-480/0-1800 RPM	
Reciprocating Saw Speed 0-3000 SPM Stroke Distance 1-1/8" (29mm) Tool Size 17" x 3.75" x 6.5" (430 x 96 x 165mm) Weight 6.28 lbs. (2.85kg) Multi Tool Interface for Accessories Oscillating Angle: 3.6° Variable 6 Speed Dial 11,000-17,000 OPM Light LED Length 12-1/6" (309mm) Bluetooth Speaker 2.5", 10W Voltage 20V Bluetooth Connectivity Up to 100ft (30m) Speaker 2.5", 10W USB Port 2.1A 5V Auxiliary Input 3.5 mm Unit Size 7000-11000 OPM Pad Diameter 5" Dust Box With Micro-Filter Dust Box With Micro-Filter Dust Box With Micro-Filter Dust Box With Micro-Filter Dust Port Fits 1-1/4" (32 mm) Vacuum Attachment Type 7000-11000 OPM Paper Attachment Type 19 Hours with a SKIL 2.0Ah Battery (Low Setting) Pivoting Angles	Clutch Setting	17+1	
Speed 0-3000 SPM Stroke Distance 1-1/8" (29mm) Tool Size 17" x 3.75" x 6.5" (430 x 96 x 165mm) Weight 6.28 lbs. (2.85kg) Multi Tool	Tool Size	7-1/8" x 2-7/8" x 7-11/16"	
Stroke Distance1-1/8" (29mm)Tool Size17" x 3.75" x 6.5" (430 x 96 x 165mm)Weight6.28 lbs. (2.85kg)Multi Tool	Reciprocating Saw		
Tool Size $17" \times 3.75" \times 6.5"$ $(430 \times 96 \times 165mm)$ Weight $6.28 \text{ lbs.} (2.85 \text{kg})$ Multi ToolInterface for Accessories 12 Pin OIS Oscillating Angle: 3.6° Variable 6 Speed Dial $11,000-17,000 \text{ OPM}$ LightLEDLength $12-1/6"$ (309mm)Bluetooth Speaker $20V$ Bluetooth ConnectivityUp to 100ft (30m)Speaker $2.5", 10W$ USB Port $2.1A 5V$ Auxiliary Input 3.5 mm Unit Size $4-3/4" \times 7" \times 5"$ $(120 \times 178 \times 127 \text{ mm})$ Bandom Orbital SanderVith Micro-FilterDust BoxWith Micro-FilterDust BoxWith Micro-FilterDust Port $Fits 1-1/4"$ (32 mm) vacuum AttachmentPaper Attachment TypeHook & LoopTool Size $300 / 150$ LumensRun Time $300 / 150$ LumensRun Time $0-104^{\circ}$ Tool Size $5.3" \times 2.8" \times 8.2"$	Speed	0-3000 SPM	
(430 x 96 x 165mm) Weight 6.28 lbs. (2.85kg) Multi Tool	Stroke Distance	1-1/8" (29mm)	
Weight6.28 lbs. (2.85kg)Multi ToolInterface for Accessories12 Pin OISOscillating Angle:3.6°Variable 6 Speed Dial11,000-17,000 OPMLightLEDLength12-1/6" (309mm)Bluetooth Speaker20VBluetooth ConnectivityUp to 100ft (30m)Speaker2.5", 10WUSB Port2.1A 5VAuxiliary Input3.5 mmUnit Size4-3/4" x 7" x 5" (120 x 178 x 127 mm)Bandom Orbital Sander5"Dust BoxWith Micro-FilterDust BoxWith Micro-FilterDust PortFits 1-1/4" (32 mm) Vacuum AttachmentPaper Attachment TypeHook & LoopSpotlight300 / 150 LumensRun Time19 Hours with a SKIL 2.0Ah Battery (Low Setting)Pivoting Angles0-104°Tool Size5.3" x 2.8" x 8.2"	Tool Size		
Multi ToolInterface for Accessories12 Pin OISOscillating Angle:3.6°Variable 6 Speed Dial11,000-17,000 OPMLightLEDLength12-1/6" (309mm)Bluetooth Speaker20VBluetooth ConnectivityUp to 100ft (30m)Speaker2.5", 10WUSB Port2.1A 5VAuxiliary Input3.5 mmUnit Size4-3/4" x 7" x 5" (120 x 178 x 127 mm)Bandom Orbital Sander5"Dust BoxWith Micro-FilterDust BoxWith Micro-FilterDust PortFits 1-1/4" (32 mm) Vacuum AttachmentPaper Attachment TypeHook & LoopSpotlight300 / 150 LumensRun Time19 Hours with a SKIL 2.0Ah Battery (Low Setting)Pivoting Angles0-104°Tool Size5.3" x 2.8" x 8.2"			
Interface for Accessories12 Pin OISOscillating Angle:3.6°Variable 6 Speed Dial11,000-17,000 OPMLightLEDLength12-1/6" (309mm)Bluetooth SpeakerVoltageVoltage20VBluetooth ConnectivityUp to 100ft (30m)Speaker2.5", 10WUSB Port2.1A 5VAuxiliary Input3.5 mmUnit Size4-3/4" x 7" x 5" (120 x 178 x 127 mm)Baddom5"Dust BoxWith Micro-FilterDust BoxWith Micro-FilterDust PortFits 1-1/4" (32 mm) vacuum AttachmentPaper Attachment TypeHook & LoopTool Size300 / 150 LumensRun Time19 Hours with a SKIL 2.0Ah Battery (Low Setting)Pivoting Angles0-104°Tool Size5.3" x 2.8" x 8.2"		6.28 lbs. (2.85kg)	
AccessoriesImage: Section of the section	Multi Tool		
Variable 6 Speed Dial 11,000-17,000 OPM Light LED Length 12-1/6" (309mm) Bluetooth Speaker 20V Bluetooth Connectivity Up to 100ft (30m) Speaker 2.5", 10W USB Port 2.1A 5V Auxiliary Input 3.5 mm Unit Size 4-3/4" x 7" x 5" (120 x 178 x 127 mm) Random Orbital Sander		12 Pin OIS	
LightLEDLength12-1/6" (309mm)Bluetooth Speaker20VBluetooth ConnectivityUp to 100ft (30m)Speaker2.5", 10WUSB Port2.1A 5VAuxiliary Input3.5 mmUnit Size4-3/4" x 7" x 5" (120 x 178 x 127 mm)Random Orbital Sander7000-11000 OPMPad Diameter5"Dust BoxWith Micro-FilterDust BoxWith Micro-FilterDust PortFits 1-1/4" (32 mm) vacuum AttachmentPaper Attachment TypeHook & LoopTool Size6.3" x 5.9" x 8.4" (160 x 151 x 213mm)Spotlight	Oscillating Angle:	3.6°	
Length 12-1/6" (309mm) Bluetooth Speaker 20V Bluetooth Connectivity Up to 100ft (30m) Speaker 2.5", 10W USB Port 2.1A 5V Auxiliary Input 3.5 mm Unit Size 4-3/4" x 7" x 5" (120 x 178 x 127 mm) Random Orbital Sander 5" Dust Box With Micro-Filter Dust Box With Micro-Filter Dust Port Fits 1-1/4" (32 mm) Vacuum Attachment Yppe (160 x 151 x 213mm) Spotlight	Variable 6 Speed Dial	11,000-17,000 OPM	
Bluetooth SpeakerVoltage20VBluetooth ConnectivityUp to 100ft (30m)Speaker2.5", 10WUSB Port2.1A 5VAuxiliary Input3.5 mmUnit Size4-3/4" x 7" x 5" (120 x 178 x 127 mm)Bandom Orbital Sander	Light	LED	
Voltage20VBluetooth ConnectivityUp to 100ft (30m)Speaker2.5", 10WUSB Port2.1A 5VAuxiliary Input3.5 mmUnit Size4'.3/4" x 7" x 5" (120 x 178 x 127 mm)Random Orbital Sander	Length	12-1/6" (309mm)	
Buetooth ConnectivityUp to 100ft (30m)Speaker2.5", 10WUSB Port2.1A 5VAuxiliary Input3.5 mmUnit Size4-3/4" x 7" x 5" (120 x 178 x 127 mm)Bandom Orbital Sander	Bluetooth Speaker		
Speaker 2.5", 10W USB Port 2.1A 5V Auxiliary Input 3.5 mm Unit Size 4-3/4" x 7" x 5" (120 x 178 x 127 mm) Random Orbital Sander	Voltage	20V	
USB Port 2.1A 5V Auxiliary Input 3.5 mm Unit Size 4-3/4" x 7" x 5" (120 x 178 x 127 mm) Random Orbital Sander 5 Speed 7000-11000 OPM Pad Diameter 5" Dust Box With Micro-Filter Dust Port Fits 1-1/4" (32 mm) Vacuum Attachment Paper Attachment Type Hook & Loop Tool Size 6.3" x 5.9" x 8.4" (160 x 151 x 213mm) Spotlight 19 Hours with a SKIL 2.0Ah Battery (Low Setting) Pivoting Angles 0-104° Tool Size 5.3" x 2.8" x 8.2"	Bluetooth Connectivity	Up to 100ft (30m)	
Auxiliary Input 3.5 mm Unit Size 4-3/4" x 7" x 5" (120 x 178 x 127 mm) Random Orbital Sander	Speaker	2.5", 10W	
Unit Size 4-3/4" x 7" x 5" (120 x 178 x 127 mm) Random Orbital Sander	USB Port	2.1A 5V	
(120 x 178 x 127 mm) Random Orbital Sander Speed 7000-11000 OPM Pad Diameter 5" Dust Box With Micro-Filter Dust Box With Micro-Filter Dust Port Fits 1-1/4" (32 mm) Vacuum Attachment Paper Attachment Type Hook & Loop Tool Size 6.3" x 5.9" x 8.4" (160 x 151 x 213mm) Spotlight Journame Two Settings 300 / 150 Lumens Run Time 19 Hours with a SKIL 2.0Ah Battery (Low Setting) Pivoting Angles 0-104° Tool Size 5.3" x 2.8" x 8.2"	Auxiliary Input	3.5 mm	
Random Orbital SanderSpeed7000-11000 OPMPad Diameter5"Dust BoxWith Micro-FilterDust PortFits 1-1/4" (32 mm) Vacuum AttachmentPaper Attachment TypeHook & LoopTool Size6.3" x 5.9" x 8.4" (160 x 151 x 213mm)SpotlightTwo SettingsRun Time19 Hours with a SKIL 2.0Ah Battery (Low Setting)Pivoting Angles0-104°Tool Size5.3" x 2.8" x 8.2"	Unit Size		
SanderSpeed7000-11000 OPMPad Diameter5"Dust BoxWith Micro-FilterDust PortFits 1-1/4" (32 mm) Vacuum AttachmentPaper AttachmentHook & LoopType"Tool Size6.3" x 5.9" x 8.4" (160 x 151 x 213mm)Spotlight		(120 x 178 x 127 mm)	
Speed7000-11000 OPMPad Diameter5"Dust BoxWith Micro-FilterDust PortFits 1-1/4" (32 mm) Vacuum AttachmentPaper Attachment TypeHook & LoopTool Size6.3" × 5.9" × 8.4" (160 × 151 × 213mm)SpotlightTwo SettingsRun Time19 Hours with a SKIL 2.0Ah Battery (Low Setting)Pivoting Angles0-104°Tool Size5.3" × 2.8" × 8.2"			
Dust Box With Micro-Filter Dust Port Fits 1-1/4" (32 mm) Vacuum Attachment Paper Attachment Hook & Loop Type 6.3" x 5.9" x 8.4" (160 x 151 x 213mm) Spotlight 19 Hours with a SKIL 2.0Ah Battery (Low Setting) Pivoting Angles 0-104° Tool Size 5.3" x 2.8" x 8.2"		7000-11000 OPM	
Dust Port Fits 1-1/4" (32 mm) Vacuum Attachment Paper Attachment Type Hook & Loop Tool Size 6.3" x 5.9" x 8.4" (160 x 151 x 213mm) Spotlight U Two Settings 300 / 150 Lumens Run Time 19 Hours with a SKIL 2.0Ah Battery (Low Setting) Pivoting Angles 0-104° Tool Size 5.3" x 2.8" x 8.2"	•	5"	
Vacuum Attachment Paper Attachment Type Hook & Loop Tool Size 6.3" x 5.9" x 8.4" (160 x 151 x 213mm) Spotlight Two Settings Two Settings 300 / 150 Lumens Run Time 19 Hours with a SKIL 2.0Ah Battery (Low Setting) Pivoting Angles 0-104° Tool Size 5.3" x 2.8" x 8.2"	Dust Box	With Micro-Filter	
Paper Attachment Type Hook & Loop Tool Size 6.3" x 5.9" x 8.4" (160 x 151 x 213mm) Spotlight Two Settings 300 / 150 Lumens Run Time 19 Hours with a SKIL 2.0Ah Battery (Low Setting) Pivoting Angles 0-104° Tool Size 5.3" x 2.8" x 8.2"	Dust Port	. ,	
Type Tool Size 6.3" x 5.9" x 8.4" (160 x 151 x 213mm) Spotlight Two Settings 300 / 150 Lumens Run Time 19 Hours with a SKIL 2.0Ah Battery (Low Setting) Pivoting Angles 0-104° Tool Size 5.3" x 2.8" x 8.2"			
(160 x 151 x 213mm) Spotlight Two Settings 300 / 150 Lumens Run Time 19 Hours with a SKIL 2.0Ah Battery (Low Setting) Pivoting Angles 0-104° Tool Size 5.3" x 2.8" x 8.2"	_ '		
Two Settings 300 / 150 Lumens Run Time 19 Hours with a SKIL 2.0Ah Battery (Low Setting) Pivoting Angles 0-104° Tool Size 5.3" x 2.8" x 8.2"	Tool Size		
Run Time 19 Hours with a SKIL 2.0Ah Battery (Low Setting) Pivoting Angles 0-104° Tool Size 5.3" x 2.8" x 8.2"			
2.0Ah Battery (Low Setting) Pivoting Angles 0-104° Tool Size 5.3" x 2.8" x 8.2"	Two Settings	300 / 150 Lumens	
Pivoting Angles 0-104° Tool Size 5.3" x 2.8" x 8.2"	Run Time	2.0Ah Battery (Low	
Tool Size 5.3" x 2.8" x 8.2"	Pivoting Angles		
		5.3" x 2.8" x 8.2"	

Includes

- Drill Driver Reciprocating Saw Multi-Tool Speaker Sander Spotlight 2.0Ah Battery with USB 4.0Ah Battery Auto **PWR**Jump™ Charger
- 2" Double-end Bit PH2 Belt Clip Wood Cutting Blade Dust Box 13 pc. Sanding Paper Sanding Pad Bi-Metal Blade Battery Jacket Wire for AUX Port Allen Key



CB739001 PWRCORE 20[™] 20V DRILL DRIVER & IMPACT DRIVER KIT

Drill Driver Features

) 1/2" SINGLE-SLEEVE, KEYLESS CHUCK For fast, easy bit changes) LED LIGHT

Turns on with trigger, stays lit for seconds after release HIGH/LOW SPEED SETTING

Right speed for the project

) FORWARD/REVERSE LED INDICATOR Check driving direction at a glance

Impact Driver Features

Drill Driver Features

Spot Light Features

104 degree pivoting head

> EASY TO ADJUST

2-STEP ILLUMINATION CONTROL

Choose the level of lighting you need

) 1/4" HEX COLLET Fast, easy bit changes) LED LIGHT Turns on with trigger, stays lit for seconds after release **VARIABLE SPEED CONTROL** Full control for a variety of projects **FORWARD/REVERSE LED INDICATOR** Check driving direction at a glance

Chuck	1/2 in. Keyless with Auto Spindle Lock
Two Speed Settings	Low 0-420, High 0-1450 RPM
Torque Settings	17 Settings + Drill Mode
Torque	350 in. lbs
Light	LED
LED Indicator	Forward/Reverse
Length	7-7/16" (189 mm)
Impact Driver	
Collet	1/4 Inch Hex
Speed	0-2500 RPM
Impacts per Minute	0-3200 IPM
Trigger	Variable Speed
Torque	1,100 in. lbs
LED Indicators	Forward/Reverse
Light	LED
Length	6" (152 mm)

Includes

Specifications

Drill Driver

Drill Driver Impact Driver 2.0Ah Battery

Standard Charger 2pcs PH2 Bits 2pcs Belt Clip



CB739601 PWRCORE 20[™] 20V 4-TOOL COMBO KIT

Specifications

) 1/2" SINGLE-SLEEVE, KEYLESS CHUCK	Drill Driver	
For fast, easy bit changes	Speed	0-420/0-1450 RPM
) LED LIGHT	Torque	350 in. lbs
Turns on with trigger, stays lit for seconds after release	Torque Setting	17+1
) HIGH/LOW SPEED SETTING	Chuck Size	1/2" Chuck
Right speed for the project	Length	7-7/16"
Impact Driver Features	Impact Driver	
-	Speed	0-2500 RPM
) 1/4" HEX COLLET Fast, easy bit changes	Impact Rate	0-3200 IPM
	Torque	1100 in. lbs
) LED LIGHT Turns on with trigger, stays lit for seconds after release	Collet Size	1/4" Hex
	Length	6"
• FORWARD/REVERSE LED INDICATOR Check driving direction at a glance	Reciprocating Saw	
Check driving direction at a glance	Stroke Distance	1"
Reciprocating Saw Features	Speed	0-3000 SPM
> TOOL-LESS BLADE CHANGE	Spot Light	
Easy blade changes	Power	300/150 lm
ADJUSTABLE PIVOTING SHOE Greater depth control	Hanging	2pcs Magnet and 1pc Hook
> UP TO 3000 SPM	Runtime	19hrs in Low Mode with 20V 2.0Ah Battery
Fast, efficient cutting	Head Rotation	104 Degrees

Includes

Standard Charger

Wood Cutting Blade

2pcs PH2 Bits

2pcs Belt Clip

Allen Key

Drill Driver Impact Driver Reciprocating Saw Spot Light 2pcs 2.0Ah Battery

/// PWRCORE 20^m **SYSTEM**



PURCHAE 20TM

This lineup offers a range of outdoor power, plus the

benefits of our patented **PWR**CORE 20[™] lithium battery.





ADVANCED BATTERY TECHNOLOGY



Industry leading battery technology wraps each cell with cooling material to keep the battery powering on for 25% longer run time.

2X BATTERY LIFE



SKIL's patented technology extends the life 2X longer.

ONE BATTERY. MANY TOOLS.

Pairs with any PWRCORE 20[™] Battery.

SKIL

PM4912B-20 PWRCORE 20[™] **BRUSHLESS 18" LAWN MOWER** WITH TWO 4.0 AH BATTERIES AND **DUAL PORT CHARGER**

25% LONGER RUN TIME 2X BATTERY LIFE



Features

POWERFUL PERFORMANCE

The digital brushless motor provides efficient, high-performance power without the hassle of gas

) PUSH-BUTTON START Get started easily and guickly with a convenient push-button start

> SINGLE LEVER HEIGHT ADJUSTMENT 6 settings to quickly adjust for your preferred grass height

) TELESCOPING/FOLDABLE HANDLE Telescoping handle folds easily for convenient vertical storage

BRUSHLESS

Specifications

-	
/oltage	2 X 20V
Motor	Brushless
Runtime	Up to 45 min
Charge Time	100 min
Deck Size	18"
Cutting Height	6 Cutting Height Settings, 1"~3"
Grass Bag	1.4 Bushel (50L) Collector Capacity
Function	2-in-1 Mulching or Bagging

Includes

2 X 20V Brushless Lawn Mower (2) 4.0Ah Battery Dual Port Charge Mulching Plug Grass Bag





Features

) DUAL ACTION HARDENED STEEL BLADES + BLADE TIP PROTECTOR For clean and precise cuts, even along paths and fences) FOR TOUGH JOBS Delivers 3,000 strokes per minute to get jobs done fast

> 3/4" CUT CAPACITY Cut through large branches and bushes with ease EASY STORAGE BRACKET

This hedge trimmer comes equipped with an Easy Storage Hook and Bracket, to conveniently store all your SKIL PWRCORE 20™ outdoor equipment with ease

SAWING FUNCTION

25% LONGER RUN TIME

Features

POWERFUL PERFORMANCE The digital brushless motor provides efficient. high-performance power without the hassle of gas) 2-SPEED SETTINGS + VARIABLE SPEED TRIGGER Delivers optimal cutting performance and

superior control

of the head

Features

25% LONGER RUN TIME

BL4714B-10 PWRCORE 20[™] BRUSHLESS 400 CFM LEAF **BLOWER WITH 4.0AH BATTERY AND CHARGER**

Specifications

Voltage	20V
Motor	Brushless
Air Volume	400 CFM
Max Air Speed	100 MPH
Speed Control	Variable with Cruise Control
Net Weight	4.4 lbs

Includes

20V Brushless Leaf Blower 4.0Ah Batterv Charger Nozzle Attachment EASYSTORAGE Bracket



BRUSHLESS

BRUSHLESS

) TOOL-LESS CHAIN TENSIONING & AUTO-LUBRICATING friction with auto-lubrication

) ANTI-KICKBACK BRAKE with confidence



44 www.skil.com

BRUSHLESS



Features

VARIABLE SPEED WITH CRUISE CONTROL

Provides control for everything from clearing flower beds or your backyard, plus cruise control to stay powered on

) TURBINE FAN

Maximizes leaf blower performance for up to 400 CFM of clearing power

) EASY STORAGE BRACKET

This blower comes equipped with an Easy Storage Hook and Bracket, to conveniently store all your SKIL PWRCORE 20[™] outdoor equipment with ease





HT4222B-10 PWRCORE 20[™] 22" HEDGE TRIMMER WITH BATTERY AND CHARGER

For cutting larger diameter branches



Specifications

Voltage	20V
SPM	3,000 spm
Blade Length	22"
Cutting Capacity	3/4"
Blade Type	Single Side Dual-Action
Blade	Hardened Steel
Net Weight	5.7 lbs

Includes

20V 22" Hedge Trimmer 2.0Ah Battery Charger Blade Sheath EASYSTORAGE Bracket

LT4823B-10 PWRCORE 20[™] BRUSHLESS 20V 13" STRING **TRIMMER WITH 4.0AH BATTERY AND CHARGER**

) EASY TO LOAD + DUAL LINE BUMP FEED

Patented Twist Load[™] Head allows you to insert the .080" line and simply twist to get started, while the dual line bump feed seamlessly feeds the line with a tap



Specifications

Voltage	20V
Motor	Brushless
Line Feed	Bump
Line Load	Twist Load™
Cutting Swath	13"
Trimmer Line	Dual 0.080" Twist Line
Net Weight	6.2 lbs

Includes

20V Brushless String Trimmer 4.0Ah Battery Charger Extra Line FASYSTORAGE Bracket & Hook

CS4562B-10 PWRCORE 20[™] BRUSHLESS 12" CHAIN SAW WITH 4.0AH BATTERY AND CHARGER

POWERFUL PERFORMANCE

The digital brushless motor provides efficient, high-performance power without the hassle of gas

Adjust the chain tension on this electric chainsaw with a convenient dial on the side of the tool while reducing

Cuts the power when kickback occurs, so you can work

Specifications

Voltage	20V
Motor	Brushless
Bar Length	12"
Chain Gauge	0.043"
Chain Pitch	3/8"
Oil Tank	6.8 fl. oz (200ml)
Net Weight	5.5 lbs
No-Load Chain Speed	7.9 m/s

Includes

Brushless 20V 12" Chainsaw 4.0Ah Battery Charger EASYSTORAGE Bracket Chain Scabbard

PURCHAU


The **PWR**CORE 40[™] platform offers a complete line-up of outdoor power tools. The power of cordless with complete brushless assortment. The patented lithium battery technology allows you to ditch the gas without sacrificing any power.

DITCH THE GAS





ADVANCED BATTERY TECHNOLOGY **PWRCORE** 40"



Industry leading battery technology. 25% longer run time. 2X battery life.

15-MINUTE CHARGING auto**PWR**JUMP"



Charges 0-30% in just 15 minutes*. Fully charges within 60 minutes*. (*Based on 2.5Ah battery)

SM4910-10 PWRCORE 40[™] BRUSHLESS 40V 20" SELF-PROPELLED MOWER KIT

25% LONGER RUN TIME

15-MINUTE CHARGING



Features

-) LOAD-SENSING TECHNOLOGY FOR OPTIMIZED **CUTTING PERFORMANCE**
-) COMPACT TELESCOPING HANDLE, TO STORE VERTICALLY
-) DIGITAL BRUSHLESS MOTOR
- **) PUSH BUTTON START**
- SELF-PROPEL WITH VARIABLE SPEED CONTROL DIAL
-) 2-IN-1 MULCHING OR BAGGING
- SINGLE-LEVER DECK HEIGHT ADJUSTMENT

O BRUSHLESS

Specifications

Voltage	40V
Motor	Brushless
Runtime	Up to 40 min
Charge Time	120 min
Deck Size	20"
Cutting Height	7 Cutting Height Settings, 1.5"~4"
Grass Bag	1.7 Bushel (60L) Collector Capacity
Self-Propel	0.4m/s-1.4m/s Variable Speed
Dimension	3.05 x 1.74 x 1.28 ft. (930 x 530 x 390 mm)

Includes

40V Brushless Self-Propelled Mower Auto **PWR**JUMP™ Charger 5.0Ah Battery Mulching Plug Grass Bag



O BRUSHLESS

OBRUSHLESS

O BRUSHLESS



LEAF BLOWER KIT

Features

Features

VERTICALLY





25% LONGER RUN TIME



Features

-) 24" CUTTING LENGTH
- 3/4" CUT CAPACITY
- **) DUAL-ACTION HARDENED STEEL BLADES**
-) DIGITAL BRUSHLESS MOTOR





/// PWRCORE 40^{°°} SYSTEM

PM4910-10 PWRCORE 40[™] BRUSHLESS 40V 20" MOWER KIT

- > LOAD-SENSING TECHNOLOGY FOR OPTIMIZED CUTTING PERFORMANCE
- COMPACT TELESCOPING HANDLE, TO STORE
-) DIGITAL BRUSHLESS MOTOR
- PUSH BUTTON START
- > 2-IN-1 MULCHING OR BAGGING
- **) SINGLE-LEVER DECK HEIGHT ADJUSTMENT**



Specifications

Voltage	40V
Motor	Brushless
Runtime	Up to 45 min
Charge Time	120 min
Deck Size	20"
Cutting Height	7 Cutting Height Settings, 1.5"~4"
Grass Bag	1.7 Bushel (60L) Collector Capacity
Dimension	3.05 x 1.74 x 1.28 ft. (930 x 530 x 390 mm)

Includes

40V Push Mower Auto **PWR**JUMP™ Charger 5.0Ah Battery

Mulching Plug Grass Bag

BL4713-10 PWRCORE 40[™] BRUSHLESS 40V 500 CFM

- **VARIABLE SPEED WITH POWER BOOST**
- 500 CFM / 120 MPH FOR CLEARING POWER
-) DIGITAL BRUSHLESS MOTOR
- **) TURBINE FAN FOR OPTIMAL PERFORMANCE**
- **QUICK-RELEASE TUBE FOR COMPACT STORAGE**



Specifications

Voltage	40V
Motor	Brushless
Air Volume	500 CFM
Max Air Speed	120 MPH
Speed Control	Variable with Power Boost
Net Weight	3.9 lbs

Includes

40V Brushless Leaf Blower 2.5Ah Battery Auto PWRJUMP™ Charge

HT4221-10 PWRCORE 40[™] BRUSHLESS 40V 24"

Specifications

Voltage	40V
Motor	Brushless
SPM	3000 spm
Blade Length	24"
Cutting Capacity	3/4"
Blade Type	Single Side Dual-Action
Blade	Hardened Steel
Net Weight	6 lbs

Includes

40V Brushless Hedge Trimmer 2.5Ah Battery Auto PWRJUMP™ Charger Blade Sheath

LT4818-10 PWRCORE 40[™] BRUSHLESS 40V 14" STRING TRIMMER KIT




TWIST LOAD™ Simply insert the line and twist to load

> 14" CUTTING SWATH

Features

-) DIGITAL BRUSHLESS MOTOR
- **) VARIABLE SPEED TRIGGER**
- ADJUSTABLE AUXILIARY HANDLE





Specifications

Voltage	40V
Motor	Brushless
Line Feed	Bump
Line Load	Twist Load™
Cutting Swath	14"
Trimmer Line	Dual 0.080" Twist Line
Net Weight	6.8 lbs

Includes 40V String Trimmer

2.5Ah Batterv Auto PWRJUMP™ Charger

PWRCORE 40 2.5Ah

and extends the battery life 2X LONGER. > PWRCORE 40[™] SYSTEM the same battery.

Features



CS4555-10 PWRCORE 40[™] BRUSHLESS 40V 14" CHAINSAW KIT

Specifications

- TOOL-LESS BLADE TENSIONING
- ANTI-KICKBACK BRAKE

Features

- DIGITAL BRUSHLESS MOTOR
-) AUTO-LUBRICATING CHAIN





Voltage 40V Motor Brushless Bar Length 14" Chain Gauge 0.043" Chain Pitch 3/8" Oil Tank 5.0 fl. oz (150ml)

7.83 lbs

Includes

Net Weight

40V Brushless Chainsaw 2.5Ah Battery Auto PWRJUMP™ Charger Chain Scabbard



Features

> PWRCORE 40[™] LITHIUM TECHNOLOGY Industry leading technology wraps each cell with cooling material for 25% LONGER RUN TIME.) PWRCORE 40™ LITHIUM BATTERY Patented techonology maximizes power and extends the battery life 2X LONGER. > PWRCORE 40[™] SYSTEM All tools in the PWRCore 40 system use the same battery.

PS4561C-10 PWRCORE 40[™] BRUSHLESS 40V 10" POLE SAW WITH BATTERY AND auto**PWR**JUMP[™] CHARGER

Features

- TELESCOPIC SHAFT & ANGLED HEAD
- **AUTO LUBRICATING & TOOL-LESS CHAIN TENSIONING**
-) ADJUSTABLE AUXILIARY HANDLE
-) DIGITAL BRUSHLESS MOTOR



Specifications

-	
Full Length	10 ft
No-Load Chain Speed	12m/s
Length Adjust Range	7.5-10ft (2.29 - 3.04m)
Bar Length	10" (Trilink)
Chain Pitch	3/8"
Chain Gauge	0.043''
Telescopic Shaft	Yes

Includes

40V Pole Saw 2.5Ah Battery Auto **PWR**JUMP™ Charger Scabbard



BRUSHLESS

SC5364-00 PWRCORE 40[™] autoPWR JUMP[™] CHARGER

Features

- FULL CHARGE IN ONE HOUR*
- WALL MOUNTING HOLES

*Based on 2.5Ah battery

BY8705-00 PWRCORE 40[™] 40V 2.5AH BATTERY

> PWRCORE 40™ LITHIUM TECHNOLOGY

Industry leading technology wraps each cell with cooling material for 25% LONGER RUN TIME.

> PWRCORE 40[™] LITHIUM BATTERY Patented techonology maximizes power

All tools in the PWRCore 40 system use

Specifications

Voltage	40V
Capacity	2.5Ah
Indicator	Fuel Gauge
Energy Content (Wh)	100

Includes

40V 2.5 Ah Battery

BY8708-00 PWRCORE 40[™] 40V 5.0AH BATTERY

Specifications

Voltage	40V
Capacity	5.0Ah
Indicator	Fuel Gauge
Energy Content (Wh)	200

Includes

40V 5.0 Ah Battery

) autoPWRJUMP™ CHARGING BOOSTS THE BATTERY FROM 0 TO 30% POWER IN JUST 15 MINUTES*

-) LED INDICATORS DISPLAY CHARGE STATUS
- COMPATIBLE WITH ALL SKIL 40V LITHIUM BATTERIES

Specifications


Input Voltage	120V~60HZ
Output Voltage	40V
Compatibility	All SKIL 40V batteries
LED Charging Indicator	Yes
Charging time	60mins for 2.5Ah battery; 120mins for 5.0Ah battery

Includes

40V Auto **PWR**JUMP™ Charger

HIGH PERFORMANCE CUTTING

Legendary power, cutting-edge innovation. Whether you're cutting metal, wood, concrete, or all of the above, SKILSAW[®] has the right saw for the job.

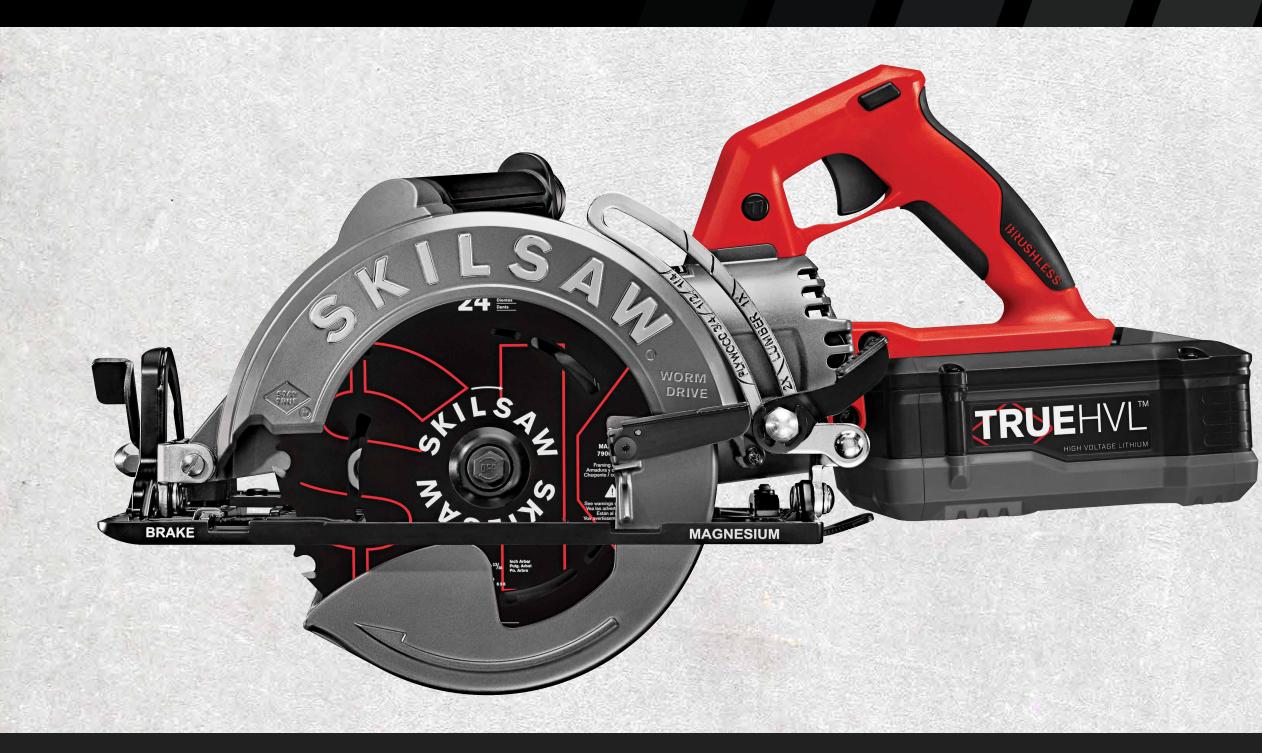

25% LONGER RUN TIME



WORM DRIVE

Distinct arrangement of cells evenly distributes heat to extend run time.

2X BATTERY LIFE




Each cell is wrapped with a temperature controlling material that keeps cells cool to provide better performance.

5K//Ľ



SPTH70M 10-1/4" **TRUE**HVL[™] CORDLESS WORM DRIVE SAW

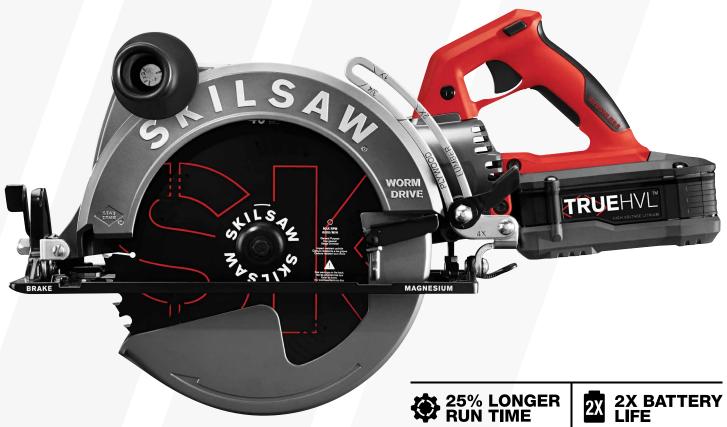

Features

) CUTS 4X IN ONE PASS Powers through tough material with up to 3-11/16" depth of cut

> POWERED BY TRUEHVL™ The battery platform designed to power worm drive > ALL MAGNESIUM CONSTRUCTION Delivers jobsite durability and performance

) IDEAL FOR FRAMING



/// TRUEHVL[™] **HIGH PERFORMANCE CUTTING**



Specifications

Ratings: 48V, 5.0Ah, 240Wh Brushless motor n_o 4,300 RPM Magnesium guards, foot plate, housings Bare Tool Weight: 13.3 lbs. (6.06 Kg) without battery, blade, and wrench Battery Weight: 4.25 lbs. (1.93 Kg)

Capacities

3-11/16 in. (93.66 mm) Max cut at 90° 2-3/4 in. (69.85 mm) Max cut at 45° 2-1/2 in. (63.5 mm) Max cut at 51°

Available Options

SPTH70M-21 2 Battery Kit SPTH70M-11 1 Battery Kit SPTH70M-01 Bare Tool

SPTH77M 7-1/4" **TRUE**HVL[™] CORDLESS WORM DRIVE SAW



TRUEHVL



SPTH15 TRUEHVL[™] LITHIUM ION BATTERY

Features

performance

extend run time

SPTH14 TRUEHVL[™] QUICK CHARGER

Features

) QUICK CHARGE TIME From zero to full charge in only 1 hour) FAN COOLED CHARGING Prevents the battery from overheating) CHARGING INDICATORS Displays the charging status



Features

WORM DRIVE GEARING

The only cordless saw with worm drive gearing. Legendary power to go anywhere.

> POWERED BY TRUEHVL™ The battery platform designed to power worm drive

) ALL MAGNESIUM CONSTRUCTION Delivers jobsite durability and performance

) IDEAL FOR FRAMING



Specifications


Ratings: 48V, 5.0Ah, 240Wh Brushless motor n_o 5,800/min Magnesium guards, foot plate, housings Bare Tool Weight: 11.09 lbs. (5.03 Kg) without battery, blade, wrench, and vacuum adapter Battery Weight: 4.25 lbs. (1.93 Kg)

Capacities

2-3/8 in. (60.33 mm) Max cut at 90° 1-15/16 in. (49.21 mm) Max cut at 45° 1-11/16 in. (42.86 mm) Max cut at 53°

Available Options

SPTH77M-21 2 Battery Kit SPTH77M-11 1 Battery Kit SPTH77M-01 Bare Tool

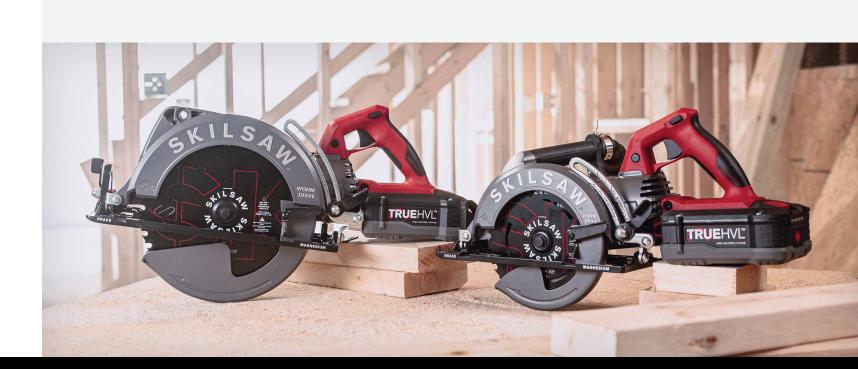

/// TRUEHVL[™] **HIGH PERFORMANCE CUTTING**

) STAY COOL™ BATTERY TECHNOLOGY

Each cell is wrapped with a temperature controlling material that keeps cells cool to provide better

) INNOVATIVE BATTERY DESIGN

Distinct arrangement of cells evenly distributes heat to

) INTELLIGENT POWER MANAGEMENT SYSTEM

Monitors and optimizes each cell to maximize power, performance and run time

Specifications

Ratings: 48V, 5.0Ah, 240Wh

Specifications

Ratings: 120V, 60Hz Maximum input power: 380W



SPT77WML-01 7-1/4" LIGHTWEIGHT WORM DRIVE SAW

Features

LIGHTEST WEIGHT MAGNESIUM DESIGN Reduces user fatigue and dissipates motor heat

> POWERFUL DUAL-FIELD™ MOTOR Increases cooling and extends tool life CUT READY™ DEPTH-OF-CUT SYSTEM Assists with quick and accurate depth measurements) IDEAL FOR FRAMING

DIABLO® BLADE CONFIGURATIONS: SPT77WML-22, SPT77WML-72

Specifications

Ratings: 15A, 120V \simeq 60 Hz, n_o 5,300/min Magnesium guards, foot plate, housings

Capacities

2-3/8 In. (60.3 mm) Max cut at 90° 1-15/16 ln. (49.2 mm) Max cut at 45° 1-11/16 In. (42.8 mm) Max cut at 53°

Includes

24-tooth SKILSAW® Carbide Blade, Multi-function Wrench (stored in foot)

SPT70V-11 16-5/16" MAGNESIUM SUPER SAWSQUATCH[™] WORM DRIVE SAW



SPT77W-01 7-1/4" WORM DRIVE SAW

Features

POWERFUL DUAL-FIELD™ MOTOR Increases cooling and extends tool life) CUT READY™ DEPTH-OF-CUT SYSTEM Assists with quick and accurate depth measurements) DURABLE STEEL FOOT CONSTRUCTION Stands up to jobsite demands

) IDEAL FOR FORMING

DIABLO® BLADE CONFIGURATIONS: SPT77W-22, SPT77W-72

Specifications

Ratings: 15A, 120V ~ 60 Hz, n_o 5,300/min Aluminum upper guard and housings, steel foot plate, magnesium lower guard

Capacities

2-13/32 In. (61.1 mm) Max cut at 90° 1-31/32 In. (50.0 mm) Max cut at 45° 1-3/4 In. (44.4 mm) Max cut at 51°

Includes

24-tooth SKILSAW® Carbide Blade. Multi-function wrench (stored in foot)

Features

) IMPRESSIVE DEPTH-OF-CUT To power through material up to 6-1/4 In. **WORM DRIVE GEARING WITH ELECTRIC BRAKE** Delivers relentless power for the biggest jobs) MAGNESIUM DIE-CAST FOOTPLATE Ensures true cuts everytime) IDEAL FOR 6X ONE PASS CUTTING

Capacities



SPT78W-01 8-1/4" WORM DRIVE SAW

Features

> EXTENDED 60 DEGREE BEVEL

Adds capacity for a wider variety of cuts POWERFUL DUAL-FIELD™ MOTOR

Increases cooling and extends tool life

WORM DRIVE DURABILITY

Combines Worm Drive gearing with all metal components for job-site durability

) IDEAL FOR HIGHER CAPACITY FORMING

DIABLO® BLADE CONFIGURATIONS: SPT78W-22

Specifications


Ratings: 15A, 120V ~ 60 Hz, n_o 4,700/min Aluminum guards and housings, steel foot plate

Capacities

2-7/8 In. (73 mm) Max cut at 90° 2-1/4 In. (57 mm) Max cut at 45° 1-1/2 In. (38 mm) Max cut at 60°

Includes

24-tooth SKILSAW[®] Carbide Blade, Multi-function Wrench (stored in foot)

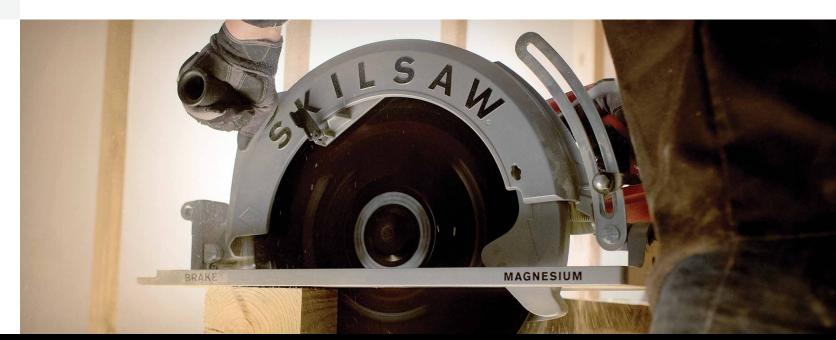

/// HIGH PERFORMANCE CUTTING

Specifications

Ratings: 15A, 120V ~ 60 Hz, n, 2,500/min Magnesium guards, foot plate and gear housing Dust Port Diameter: 1-7/8 In.

6-1/4 In. (156 mm) Max cut at 90° 4-5/16 ln. (109 mm) Max cut at 45°

Includes

32-Tooth SKILSAW[®] Carbide Blade, with 1" Round Arbor, Adjustable Auxiliary Handle, Multi-function Wrench (stored in foot), Saw Stand

SK/Ľ



Features

) 14-1/4 IN. DEPTH OF CUT Powers through material in one pass **WORM DRIVE GEARING WITH ELECTRIC BRAKE** Delivers relentless power and proven durability **) FULL HOUSE CHAIN** Provides fast and accurate cuts with unmatched precision) IDEAL FOR ACCURATE LARGE CAPACITY CUTTING

Specifications

Ratings: 15A, 120VAC, 60 Hz, n. 6,300/min Chain: 56 Tooth Full House, Bar Length: 16 in. (406mm)

Capacities

14-1/4 In. (362mm) Depth of cut at 0° 8-3/4 In. (222mm) Depth of cut at 45° 5-1/2 In. (138mm) Depth of cut at 60°

Includes

SPT55 16 In. Worm Drive Sawsquatch™ Carpentry Chainsaw, SKILSAW 56T Full House Chain, 16 In. Guide Bar, Auxiliary Handle, Saw Stand, Chain Sheath



SPT70WM-01 10-1/4" MAGNESIUM SAWSQUATCH[™] WORM DRIVE SAW

Features

) IMPRESSIVE DEPTH-OF-CUT Cuts 4X in one pass and tackles LVL, glulam, pine and PSL > POWERFUL DUAL-FIELD™ MOTOR Increases torque with a larger motor for big cuts **WORM DRIVE DURABILITY** Combines Worm Drive gearing with all metal components for job-site durability) IDEAL FOR 4X ONE PASS CUTTING

SPT70WM-22, SPT70WM-72

CIRCULAR SAW

Features

> LEFT BLADE SIDEWINDER™ Improves blade and cut line accuracy and visibility) ALL MAGNESIUM CONSTRUCTION Reduces user fatigue and adds durability POWERFUL DUAL-FIELD™ MOTOR Increases cooling and extends tool life) IDEAL FOR CUT-LINE VISIBILITY





SPT67WM-22 7-1/4" MAGNESIUM SIDEWINDER™ **CIRCULAR SAW**

Features

Increases cooling and extends tool life) BEST-IN-CLASS TORQUE) IDEAL FOR FRAMING / FORMING

DIABLO® BLADE CONFIGURATIONS:

Specifications

Ratings: 15A, 120V ~ 60 Hz, n0 4,700/min Magnesium guards, foot plate and gear housing

Capacities

3-11/16 ln. (93.6 mm) Max cut at 90° 2-3/4 In. (69.8 mm) Max cut at 45° 2-1/2 In. (63.5 mm) Max cut at 51°

Includes

40-tooth SKILSAW® Carbide Blade, Multi-function Wrench (stored in foot), Multi-position Handle

SPT67M8-01 7-1/4" LEFT BLADE SIDEWINDER[™]

Specifications

Ratings: 15A, 120V ~ 60 Hz, n, 5,300/min Magnesium guards & foot plate, resin housings

Capacities

2-7/16 In. (62 mm) Max cut at 90° 1-7/8 In. (47 mm) Max cut at 45° 1-1/2 In. (38 mm) Max cut at 56°

Includes

24-tooth SKILSAW® Carbide Blade, Multi-function Wrench (stored in foot)

) ALL MAGNESIUM CONSTRUCTION Reduces user fatigue and adds durability POWERFUL DUAL-FIELD™ MOTOR Improves productivity by increasing speed of cut

Specifications

Ratings: 15A, 120V ~ 60 Hz, n_o 5,300/min Magnesium guards, magnesium foot plate, magnesium housing

Capacities

2-7/16 In. (62 mm) Max cut at 90° 1-7/8 ln. (47 mm) Max cut at 45° 1-1/2 In. (38 mm) Max cut at 56°

Includes

24-tooth DIABLO® Carbide Blade, Multi-function Wrench (stored in foot)



SPT67WMB-01 7-1/4" MAGNESIUM SIDEWINDER™ **CIRCULAR SAW WITH BRAKE**

Features

) ELECTRIC CONVENIENCE BRAKE Helps make repetitive cuts faster

) ALL MAGNESIUM CONSTRUCTION Reduces user fatigue and adds durability > POWERFUL DUAL-FIELD™ MOTOR Increases cooling and extends tool life) IDEAL FOR FRAMING / FORMING

DIABLO® BLADE CONFIGURATIONS: SPT67WMB-22

Specifications

Ratings: 15A, 120V \simeq 60 Hz, n_o 5,300/min Magnesium guards, magnesium foot plate, magnesium housing

Capacities

2-7/16 In. (62 mm) Max cut at 90° 1-7/8 In. (47 mm) Max cut at 45° 1-1/2 In. (38 mm) Max cut at 56°

Includes

24-tooth SKILSAW® Carbide Blade, Multi-function Wrench (stored in foot)



SPT62MTC-22 12" DRY CUT SAW

Features

38.2 LBS.

Lightweight portability perfect for the shop or jobsite) PROFESSIONAL 15 AMP MOTOR WITH LARGE **CUTTING CAPACITY** Stands up to jobsite applications **) SAW FEATURES CERMET-TIPPED BLADE TECHNOLOGY** For weld ready and faster cuts than abrasive chop saws) IDEAL FOR THICK GAUGE METAL

Features

Increases comfort and control

) IDEAL FOR THICK GAUGE METAL

Features



SPT67FMD-01 7-1/4" SIDEWINDER™ CIRCULAR SAW FOR **FIBER CEMENT**

Features

) UNIQUE DUST COLLECTION DESIGN Channels silica dust away from the tool motor for longer life

> SEALED BEARINGS AND DUST-RESISTANT SWITCH Protects the saw from silica dust for longer life

) NO-MARD CORD SLEEVE Keeps cord and hose out of the way) IDEAL FOR FIBER CEMENT

DIABLO® BLADE CONFIGURATIONS: SPT67FMD-22

Specifications

Ratings: 15A, 120V ~ 60 Hz, n₀ 5,300/min Magnesium guards, magnesium foot plate

Capacities

2-7/16 In. (62 mm) Max cut at 90° 1-7/8 In. (47 mm) Max cut at 45° 1-1/2 In. (38 mm) Max cut at 56°

Includes

4-tooth SKILSAW® blade for Fiber Cement, 8 ft. Vacuum hose with nylon sleeve, 1.5 in. Vacuum hose adapter, 2.5 in, Vacuum hose adapter and Multi-function wrench (stored in foot)





SPT78MMC-01 8" OUTLAW[™] WORM DRIVE FOR METAL

Features

WORM DRIVE GEARING OPTIMIZED FOR METAL

Balances torgue and speed to cut through metal

ONLY LEFT-BLADE SAW BUILT WITH SIGHT WINDOW Adds visibility to make accurate cuts

) LARGEST AVAILABLE CHIP TRAY Holds 33% more for improved productivity) IDEAL FOR METAL FABRICATION

DIABLO® BLADE CONFIGURATIONS: SPT78MMC-22

Specifications

Ratings: 15A, 120V ~ 60 Hz, n, 3,900/min Magnesium Guards & Housings, Stainless Steel Foot, Resin Handles

Capacities

2-3/4 In. (70 mm) Max Cut at 90°

Includes

42-tooth SKILSAW[®] Carbide-tipped blade and Wrench (stored in foot)



) FIRST WORM DRIVE CONCRETE SAW Delivers a complete concrete cutting system with worm drive power and durability) CUT-READY™ ADJUSTABLE PLUNGE LOCK Quickly and easily sets straight plunge cuts WET/DRY DUST MANAGEMENT SYSTEM WITH GFCI PROTECTION

Controls dust for cleaner cuts and longer tool life) IDEAL FOR CONCRETE/MASONRY

Decorative • New Scoring • Control Joints

) COMPACT PORTABLE FRAME WEIGHING ONLY

Specifications

Ratings: 15A, 120V ~ 60 Hz, n, 1,500/min Aluminum guards & base, resin housing & handles

Capacities

4.53 ln. (115 mm) Max cut @ 90° for round pipe 3.94 In. (100 mm) Max cut @ 90° for square stock 3.15 In. x 6.22 In. (80 mm x 158 mm) Max cut @ 90° for rectangular stock

Includes

60-tooth DIABLO® CERMET Carbide Blade, Wrench (stored in foot)

SPT84-01 14" ABRASIVE CUT-OFF SAW

) LIGHTEST WEIGHT CHOP SAW AT 34 LBS.

Lightweight portability perfect for the shop or jobsite) CUSTOM "D" HANDLE AND GUARD DESIGN

) STAMPED STEEL GUARDS AND CHIP DEFLECTOR Improved chip management and job-site durability

Specifications

Ratings:15A, 120VAC, 60 Hz, n, 3,800/min Steel Guards, Base & Vise, Die Cast Arm & Gear Housing, Resin Motor Housing & Handles

Capacities

5 in. (127 mm) Max Cut @ 90° for Round Pipe 4 1/2 in. (114 mm) Max Cut @ 90° for Square Stock 4 in. x 7 5/8 in. (101 mm x 193 mm) Max Cut @ 90° for Rectangular Stock

Includes

14 in. SKILSAW[®] Metal Cutting Abrasive Wheel, Wrench (stored in base)

SPT79-00 7" MEDUSAW[™] WORM DRIVE FOR CONCRETE

Specifications

Ratings: 15A, 120V ~ 60 Hz, n, 4,700/min Aluminum guards, foot plate, housings

Capacities

2 In. (50.8 mm) Max cut at 90°

Includes

GFCI, Vacuum Adapter with Clamp (fits1-7/8 In. and 2-1/2 In. hoses), Water Feed Assembly, Multi-Function Wrench (stored in foot)



SPT99T-01 8-1/4" PORTABLE WORM **DRIVE TABLE SAW**

Features

) LEGENDARY WORM DRIVE GEARING Maximum torque for ripping applications **) RACK AND PINION FENCE SYSTEM** Make fence adjustments quickly and smoothly for accurate cuts

POWERFUL AND COMPACT Cuts 3x with ease in a portable, lightweight design) IDEAL FOR RIPPING

Includes

24-tooth SKILSAW® carbide blade for rip cutting, miter gauge, rack & pinion fence, smart guard system including anti-kick back device, insert plate, push stick, wrench

Capacities

Specifications

table topand rack & pinion fence

Ratings:15A, 120VAC, 60 Hz n_o 5,300/min

All-metal roll cage design, die cast aluminum

2-5/8 in. (68 mm) Max cut at 90° 1-7/8 in. (48 mm) Max cut at 45° 25 in. Max rip capacity on right side of the blade



SPT79A-10 7" MEDUSAW[™] WALK BEHIND WORM DRIVE FOR CONCRETE

Features

WORM DRIVE CONCRETE SAW drive power and durability) ADJUSTABLE HANDLE PROTECTION

SPT99-12

Features

CAPACITY

accurate cuts

site surfaces

Features

-) LIGHTWEIGHT **) SHADOW LIGHT**
- the cutline
- SPT88-02





Delivers a complete concrete cutting system with worm

Extends to optimal height and folds for easy transport **WET/DRY DUST MANAGEMENT SYSTEM WITH GFCI**

Controls dust for cleaner cuts and longer tool life) IDEAL FOR CONCRETE/MASONRY • New Scoring • Control Joints • Joint Repair • Cleanout

Specifications

Ratings: 15A, 120V ~ 60 Hz, n_o 5,100/min Aluminum guards, foot plate, housings

Capacities

2 In. (50.8 mm) Max cut at 90°

Includes

GFCI, Carry Bag, Triple Size Vacuum Adapter with Clamp (fits 3.5 cm, 1-7/8 In. and 2-1/2 In. hoses). Water Feed Assembly. Auxiliary Handle, Multi-Function Wrench (stored on foot)

SPT99-11 10" HEAVY DUTY WORM DRIVE TABLE SAW WITH STAND

) 3-1/2 IN. DEPTH OF CUT AND 30-1/2 IN. RIP

Cuts through 4X for increased productivity PRECISION RACK AND PINION FENCE SYSTEM Makes fence adjustments quickly and smoothly for

RUGGED ROLLING STAND WITH 16 IN. WHEELS Delivers unsurpassed mobility over stairs and rough job-

) IDEAL FOR JOB-SITES

DIABLO® BLADE CONFIGURATIONS:

Specifications

Ratings: 15A, 120V ~ 60 Hz, n_o 5,000/min Steel roll-cage design, die cast table top and side extension

Capacities

3-1/2 ln. (89 mm) Depth of cut at 90° 2-1/4 In. (58 mm) Depth of cut at 45° 30-1/2 In. Max Rip capacity on right side of the blade 16-1/2 In. Max Rip to Left of Blade

Includes

30-Tooth SKILSAW[®] Carbide Blade for rip cutting, Miter Gauge, Smart Guard system including anti-kick back device, Dust Elbow, Insert Plate, Push Stick, Wrench, Rip Fence

SPT88-01 12" WORM DRIVE DUAL BEVEL SLIDING MITER SAW

WORM DRIVE GEARING WITH ELECTRIC BRAKE

Delivers relentless power and proven durability

Lightest-in-class weight, easy transportation

LED light casts a shadow to accurately align with

) IDEAL FOR ACCURACY AND PORTABILITY

DIABLO® BLADE CONFIGURATIONS:

Specifications

Ratings: 15A, 120V ~ 60 Hz, n, 4,000/min Arbor: 1 in. Diameter, Tool Weight: 51lbs., Blade Diameter: 12 in.

Capacities

Max. Miter Angle: 60° right, 50° left Max. Bevel Angle: 48° right and left Miter Detents: 0°, 15°, 22.5°, 31.6°, 45° right and left, 60° right, 50° left Bevel Stops: 0°, 22.5°, 33.9°, 45°, 48° left and right

Includes

SKILSAW[®] 60 Tooth Carbide Blade, Left and Right Crown Stops with Fastening Knobs, Dust Bag, Dust Elbow, 2-size Allen Wrench, Miter Lock Knob, Clamp

SPT44-10 15 AMP HEAVY DUTY RECIPROCATING SAW

Features

) TOUGH 15 AMP MOTOR Provides more power for all applications > PATENTED BUZZKILL™ TECHNOLOGY Delivers best in class in-line vibration suppression CONSTANT RESPONSE ELECTRONICS Supplies consistent power for the toughest cuts) IDEAL FOR DEMOLITION

Specifications

Ratings: 15A, 120V ~ 60 Hz, n_o 0-2900 SPM


Capacities 1-1/4 In. (32 mm) Stroke length

Includes 15 Amp Heavy Duty Reciprocating Saw, Carrying Case

OUR MOTORS ARE BUILT FOR SAWS

+ Dual Copper Windings Increases copper surface area by 40% to keep the motor cool

+ Dependable Motor Cooler running motor tackles the most difficult cuts







SPT44A-00 13 AMP RECIPROCATING SAW

Features

) TOUGH 13 AMP MOTOR Provides power for all applications PATENTED BUZZKILL™ TECHNOLOGY Delivers best in class in-line vibration suppression VARIABLE SPEED TRIGGER Controls tool speed for cutting specialized materials) IDEAL FOR DEMOLITION

Specifications Ratings: 13A, 120V ~ 60 Hz, n₀ 0-2800 SPM

Capacities 1-1/8 In. (28 mm) Stroke length

Includes 13 Amp Reciprocating Saw




/// HIGH PERFORMANCE CUTTING





CORDED TOOLS

Saws, Drills, Sanders & Grinders; everything you need to tackle any job.

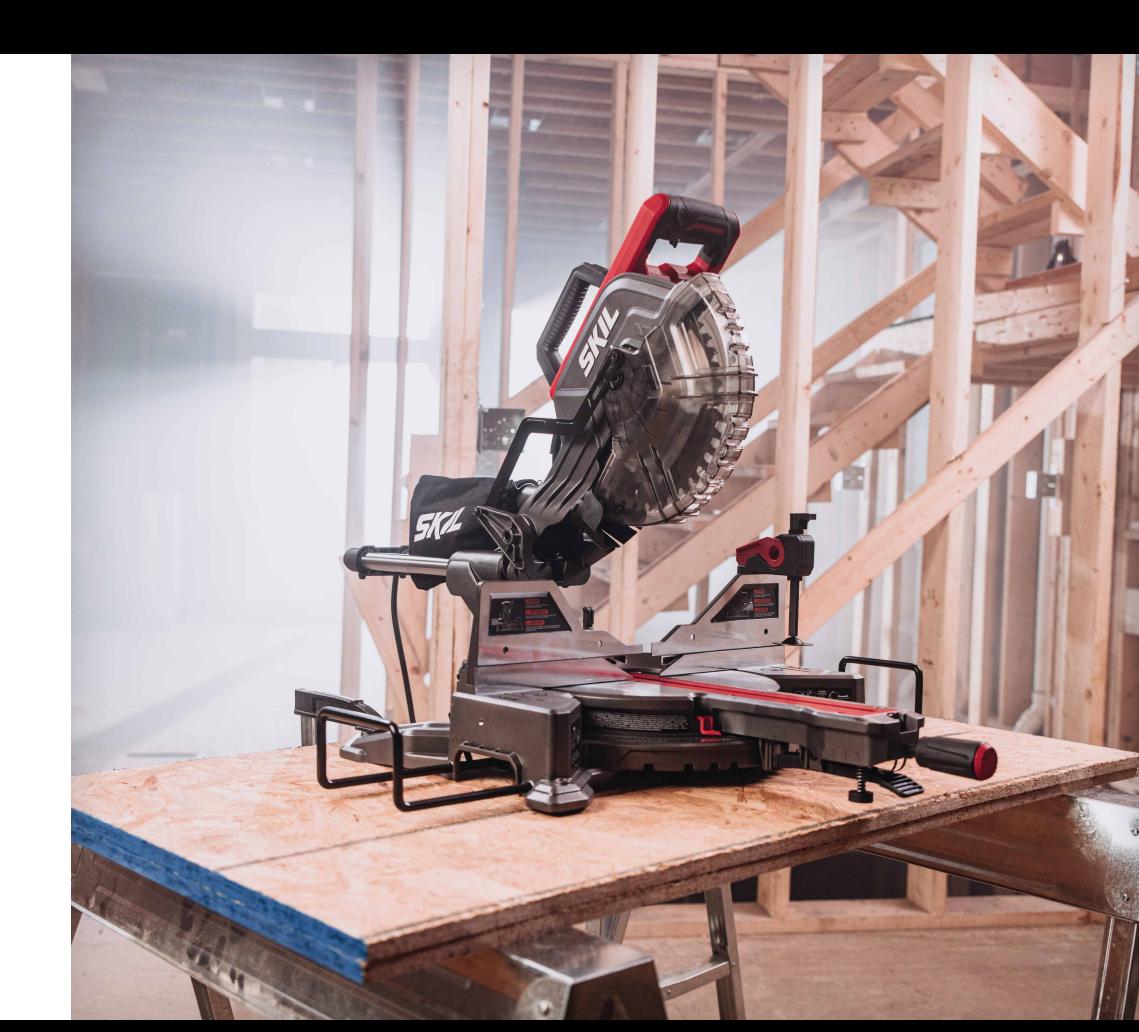



TS6307-00 15 AMP 10" TABLE SAW

Features

RACK AND PINION FENCE RAILS

Ensures fence stays parallel to blade for fast, smooth, and accurate cuts) INTEGRATED FOLDING STAND

Legs quickly fold in to provide portability and

convenient storage

) PARALLEL BLADE ALIGNMENT

Available micro-adjustment of blade so that it is parallel to rip fence and miter slot

) 4x4 CUTTING CAPACITY

Cuts material up to 4x4 at 90 degrees

) -2-47° BEVEL CAPACITY

Cuts between two positive stops at 0 and 45 degrees with quick release lever

) DUST PORT ELBOW

Redirects dust to a container for easy cleanup



MS6305-00 10" DUAL BEVEL SLIDING MITER SAW

Features

> POWERFUL 15 AMP MOTOR Delivers 5,000 RPM for quick, detailed cuts

) DUAL BEVEL

Perform cuts in four positive stop positions at 48°

& 45° left, 0°, and 45° right

) LED SHADOW LINE

Provides high precision cuts with greater accuracy than lasers

) 2x12 CUTTING CAPACITY

Cross cuts lumber up to 2x12 at 90 degrees, and 2x8 lumber at 45 degrees

CUTS AT COMMON ANGLES

Cuts up to 50 degrees left and right with 11 positive stops at most used angles

) SLIDE RAIL SYSTEM

Linear bearings allow for smooth and accurate operation to cut

Rating	15 Amps, 120V
Speed	4800 RPM
Blade Diameter	10"
Blade Arbor Size	5/8"
Max Miter Angle	50° Right, 50° Left
Max Bevel Angle	45° Right, 48° Left
Miter Detents Left	0°, 15°, 22.5°, 31.6°, 45°
Miter Detents Right	0°, 15°, 22.5°, 31.6°, 45°
Bevel Stops Left	0°, 45°, 48°
Bevel Stops Right	45°

Includes

Specifications

Depth of Cut at 45°

Depth of Cut at 90°

15 Amps, 120V

4600 RPM

10"

5/8"

2-1/2"

3-1/2"

6 ft

-2° - 47°

Dust Port Elbow

(2) Wrenches

Riving Knife/

Spreader

Rip Fence

24T Blade

Rating

Speed

Blade Size

Arbor Size

Bevel Cut

Cord Length

Includes

Table Saw with

Blade Guard

Miter Gauge

Push Stick

Stand

Integrated Folding

Anti Kick-Back Pawl

Specifications

Miter Saw Miter Lock Knob 40T Carbide Blade Carrying Handle (2) Carrying Handle Dust Bag Screws Double-Ended Allen Wrench **Right Sliding Fence** Work Clamp



Features

) 51° BEVEL WITH POSITIVE STOP AT 45° Greater cut capacity) 14 AMP 2.4 HP MOTOR Easily cuts through a variety of materials) SPINDLE LOCK Fast, convenient blade changes **CONTOURED MAIN HANDLE** For comfort and control) 20 TOOTH CARBIDE BLADE

Quick, quality cuts in common lumber and sheet goods

POWER-ON INDICATOR LIGHT

Features

> 51° BEVEL WITH POSITIVE STOP AT 45° Greater cut capacity) SPINDLE LOCK Fast, convenient blade changes **CONTOURED MAIN HANDLE** For comfort and control 24 TOOTH CARBIDE BLADE Quick, quality cuts in common lumber and sheet goods) SAFETY LOCKOUT GUARDED TRIGGER Protects against accidental starts) SINGLE BEAM LASER

Features

) SPEED CONTROL LCD DISPLAY **) ELECTRONIC FEEDBACK**

being routed) SOFT START **) LIVE TOOL INDICATOR**

Stay safe and alert with an indicator that lights up when plunge router is connected to power) FAST AND ACCURATE SET-UP Three coarse depth settings with micro-depth adjust-

Features

) 51° BEVEL WITH POSITIVE STOP AT 45°

Greater cut capacity) 13 AMP 2.3 HP MOTOR

Easily cuts through a variety of materials) SPINDLE LOCK

Fast, convenient blade changes **) CONTOURED MAIN HANDLE**

For comfort and control

) 18 TOOTH CARBIDE BLADE

Quick, quality cuts in common lumber and sheet goods

5080-01 13 AMP 7-1/4" CIRCULAR SAW

Specifications

Rating	13 Amps, 120V
RPM	5300
Max Cut Capacity	2-7/16 in. (61.9 mm)
Max Cut at 45°	1-15/16 in. (49.2 mm)
Tool Weight	7.0 lbs
Cord Length	6ft (1.8 m)

Includes

7-1/4" Circular Saw 18-Tooth Carbide Blade Wrench





5180-01 7-1/4" CORDED CIRCULAR SAW

Specifications

Rating	14 Amps, 120V
RPM	5300
Max Cut Capacity	2-7/16 in. (61.9 mm)
Max Cut at 45°	1-15/16 in. (49.2 mm)
Tool Weight	7.2 lbs
Cord Length	6ft (1.8 m)

Includes

7-1/4" Circular Saw 20-Tooth Carbide Blade Wrench

5280-01 7-1/4" CORDED CIRCULAR SAW WITH LASER

Specifications

Rating	15 Amps, 120V
RPM	5300
Laser	Class IIIa, 650 nm, < 5 mw
Max Cut Capacity	2-7/16 in. (61.9 mm)
Max Cut at 45°	1-15/16 in. (49.2 mm)
Tool Weight	8.7 lbs
Cord Length	6ft (1.8 m)

Includes

7-1/4" Circular Saw 24-Tooth Carbide Blade Wrench Carrying Bag

RT1322-00 14 AMP PLUNGE AND FIXED BASE DIGITAL ROUTER

Lets you select the bit type and material for suggested speed settings based on the task at hand

Ensures motor maintains RPM while the material is

Provides a safe and controlled start to routing

ment makes fast and accurate depth adjustments

Specifications

Rating	14 Amps, 2.5 HP
Speed	10,000 - 25,000 RPM
LCD Screen	1" x 1.5"
Fixed Base	3 Depth of Cut Positions, Each with Micro Adjustment up to 1-1/4"
Plunge Base Depth of Cut Adjustment	2"
Fixed Base Diameter	6"
Plunge Base Diameter	6-11/16"

Includes

Router with Fixed and Plunge Base Parallel Guide Fixed Base Dust Extraction Adaptor

Plunge Base Dust Extraction Adaptor Collet Wrench 1/4" and 1/2" Collet



RT1323-00 10 AMP FIXED BASE ROUTER

Features

) SOFT START

Provides a safe and controlled start to routing) SPEED CONTROL

Lets you adjust speed based on the material

) LIVE TOOL INDICATOR

Stay safe and alert with an indicator that lights up when the router is connected to power

) DURABLE & ERGONOMIC

Die-cast motor housing and shaped handles provide superior grip and control

) FAST AND ACCURATE SET-UP

Three coarse depth settings with micro-depth adjustment makes fast and accurate depth adjustments

Specifications

Rating	10 Amps, 1-3/4 HP
Speed	10,000 - 25,000 RPM
Input	120V, 60HZ
Depth of Cut Adjustment	1-3/4"
Fixed Base Diameter	6"
Sub-Base Opening	1-1/4"
Tool Size	10"x 6" x 9-1/4" (255 x 152 x 235 mm)

Includes

Router Parallel Guide Collet Wrench Dust Extraction Adaptor 1/4" and 1/2" Collet



9206-02 7.5 AMP VARIABLE SPEED **RECIPROCATING SAW**

Features

) HEAVY-DUTY METAL GEAR HOUSING For increased life and durability) TOOL-LESS BLADE CHANGE For easy blade changes **) PIVOTING FOOT**

Features

Provides stability when cutting through materials **COUNTER BALANCE** For vibration control **POWERFUL 7.5 AMP MOTOR** Power to get the job done

JS313101 5 AMP CORDED JIGSAW

Features

-) 4 ORBITAL SETTINGS For smooth cuts on a variety of materials
-) TOOL-LESS BLADE CLAMP
- Fast and secure changes of T or U shank blades

) DUST BLOWER SWITCH Keeps cut line clear of dust

) VARIABLE SPEED TRIGGER WITH LOCK-ON

For continuous cutting

> 5 AMP MOTOR

Powerful for many applications

) BASE ADJUSTMENT BEVELING Cut at different angles

Specifications	
Rating	5 Amps, 120V
Speed	0-3000 SPM
Stroke Distance	3/4" (18 mm)
Bevel Capacity	0° ± 45°
Blade Type	T & U Shank
Tool Size	9-1/3" x 3" x 8-1/8" (237 x 77.6 x 206.5 mm)

Includes

Jig Saw Wood Blade Metal Blade Allen Key



) HEAVY-DUTY METAL GEAR HOUSING For increased life and durability) TOOL-LESS BLADE CHANGE For easy blade changes **) POWERFUL 9 AMP MOTOR** Ample power for the job **COUNTER BALANCE** For vibration control **POWER-ON INDICATOR** For safety and convenience



JS314901 6 AMP CORDED JIGSAW

Features

) 4 ORBITAL SETTINGS

For smooth cuts on a variety of materials

) TOOL-LESS BLADE CLAMP Fast and secure changes of T or U shank blades

) DUST BLOWER SWITCH

Keeps cut line clear of dust

) VARIABLE SPEED TRIGGER WITH LOCK-ON For continuous cutting

) 6 AMP MOTOR

Powerful for many applications) TOOL-LESS BASE ADJUSTMENT BEVELING Cut at different angles) HALO LIGHT™ Provides 10X more light than common LEDs

Specifications

Rating	6 Amps, 120V
Speed	800-3200 SPM
Stroke Distance	7/8" (23 mm)
Bevel Capacity	0° ± 45°
Blade Type	T & U Shank
Tool Size	10.23" x 2.9" x 8.4" (260 x 74 x 214 mm)

Includes

Jig Saw Wood Blade Metal Blade



Features) 1/2" HEAVY-DUTY METAL CHUCK

Accepts large diameter bits for heavy duty jobs **) POWERFUL 7.5 AMP MOTOR** Tackle tough applications **) VARIABLE SPEED TRIGGER** For increased control) SIDE-ASSIST HANDLE

With depth rod for increased control in high torque applications) LOCK-ON BUTTON For extended drilling **) SOFT-GRIP HANDLE** For added comfort



Specifications

Rating	7.5 Amps, 120V
Stroke	1-1/8" (29 mm)
Speed	800-2700 SPM
Tool Size	20.8" x 6" x 3.8" (528 x 152 x 96 mm)
Weight	8 lbs (3.6 Kg)

Includes

Reciprocating Saw Wood Blade Allen Key

9216-01 9 AMP VARIABLE SPEED RECIPROCATING SAW

Specifications

Rating	9 Amps, 120V
Stroke	1-1/8 in. (29mm)
Variable Speed	800 to 2700 SPM
Weight	7.2 lbs

Includes

Reciprocating Saw Wood Cutting Blade

DL181901 7.5 AMP 1/2" CORDED DRILL

Specifications

Rating	7.5 Amps, 120V
Chuck Size	1/2" Keyed
Speed	0-950 RPM
Cord Length	6ft (1.8 m)
Tool Size	14" x 3" x 8-5/8" (355 x 77 x 220 mm)

Includes

Drill Side Handle Depth Gauge Chuck Key



HD182001 7.5 AMP 1/2" CORDED HAMMER DRILL

Features

) 1/2" HEAVY-DUTY METAL CHUCK

Accepts large diameter bits for heavy duty jobs

> POWERFUL 7.5 AMP MOTOR Tackle tough applications

VARIABLE SPEED TRIGGER

For increased control **) SIDE-ASSIST HANDLE**

With depth rod for increased

control in high torque applications

) LOCK-ON BUTTON For extended drilling


) SOFT-GRIP HANDLE

For added comfort

2-IN-1 DRILLING FUNCTION

Easily swtich between drilling and hammer drilling

Specifications Rating 7.5 Amps, 120V Chuck Size 1/2" Keyed Speed 0-3000 RPM



Includes

Hammer Drill Side Handle Depth Gauge Chuck Key



Features

DUAL DUST PORTS Keeps the workspace free of saw dust for better visibility

) ON-BOARD WRENCH STORAGE Always have the wrench in reach) LOCK OFF SAFETY SWITCH Prevents unintended start ups **> SMOOTH KICKSTAND** Prevents blade from scratching finished surfaces



6239-01 5.5 AMP 3/8" CORDED DRILL

Features

) KEYLESS CHUCK For fast and easy bit changes

NON-SLIP BUMPERS

For surface and tool protection

) FORWARD / REVERSE OPERATION For ease of use

> SOFT GRIP

For better balance and control

) HORIZONTAL BUBBLE LEVEL

For precise and accurate drilling

) 5.5 AMP MOTOR Powerful motor ideal for tough applications

Specifications

Rating	5.5 Amps, 120V
Speed	0-2700 RPM
Chuck	3/8", 2 Sleeve Keyless
Cord Length	6ft (1.8 m)

Includes

Drill



Captures and contains fine dust particles **PRESSURE CONTROL TECHNOLOGY** Monitors sanding belt pressure applied for optimal results) AUTO-TRACK SYSTEM Keeps belt centered on track) TRIGGER LOCK-ON **) SINGLE LEVER BELT CHANGES**

6335-02 7 AMP 1/2" CORDED DRILL

Features

POWERFUL 7.0 AMP MOTOR

For tough applications

) 1/2" KEYED CHUCK To accept large diameter bits designed for

woodworking and cutting SIDE-ASSIST HANDLE

For increased control

For controlled, accurate drilling VARIABLE SPEED TRIGGER

Lets you control drilling speed) HORIZONTAL BUBBLE LEVEL For precise drilling and driving) 2-FINGER TRIGGER WITH LOCK-ON

Specifications

Rating	7.0 Amps
Speed	0-950 RPM
Chuck	1/2" Keyed
Cord Length	8ft

Includes

Drill



Features

LOW VIBRATION Its ergonomic design, soft rubber grip, and counterweight balance reduce hand fatigue from vibration


HOOK & LOOP SYSTEM For simple and quick sanding sheet changes


) MULTI-FUNCTION reach areas

) MICRO-FILTRATION SYSTEM Captures and contains fine dust particles

1.2 AMP MOTOR

Delivers a smooth performance over a variety of sanding applications with 13,500 OPM





PL201201 6.5 AMP 3-1/4 IN. PLANER

Specifications

Rating	6.5 Amps, 120V
Blade Width	3-1/4"
Speed	16000 RPM
Max Cutting Depth in Single Pass	5/64"
Depth Adjustment Amount	1/128"
Max Rabbet Depth	5/16"
Cord Length	6 ft
Tool Size	11.6" x 6.4" x 6.9"

Includes

Planer	
Parallel Guide	
Dust Bag	

Spanner Rabbet Fence Adaptor

7510-01 3 X 18" 6 AMP BELT SANDER

) MICRO-FILTRATION CANISTER

Specifications

Rating	6 Amps, 120V
Belt Speed	1050 SFPM
Belt Size	3 x 18 in. (76 mm x 457 mm)
Vacuum Port	Fits 1-1/4" Hose
Weight	6.4 lbs

Includes

Belt Sander 3 x 18 in. 80 Grit Sanding Belt Clear-View Dust Canister

SR232301 CORDED MULTI-FUNCTION DETAIL SANDER

Comes with additional detail attachments for fine finishing large surfaces, corners, edges, and hard to

Specifications

Rating	1.2 Amps, 120V
Pad Size	4" x 5-3/4"
Speed	13500 OPM
Sandpaper Attachment Method	Hook & Loop
Tool Size	7-7/8" x 4" x 5-5/8"

Includes

Multi-Sander 12pcs 120 Grit Sandpaper Dust Canister Finger Attachment Louver Attachment Unique Flexible Attachment



SR211601 5" CORDED RANDOM ORBITAL SANDER

Features

VARIABLE SPEED CONTROL Provides the right amount of power and

control across dierent materials

) DUST SEALED POWER SWITCH

For extended tool life

X-FLOW DUST COLLECTOR

Collects dust using cyclone force into an easy-to-empty transparent container

LOW VIBRATION

Its ergonomic design, soft rubber grip, and counterweight balance reduce hand fatigue from vibration

2.8 AMP MOTOR

Delivers a smooth performance over a variety of sanding applications with 13,000 OPM

Specifications

Rating	2.8 Amps, 120V
Pad Size	5"
Speed	7,000-13,000 OPM
Sandpaper Attachment Method	Hook & Loop
Tool Size	7-7/8" x 4-4/5" x 5-1/2"

Includes

Random Orbital Sander 3pcs 120 Grit Sandpaper Dust Canister



AG242001 8 AMP 5" CORDED ANGLE GRINDER

Features

3-POSITION SIDE HANDLE WITH WRENCH STORAGE Allows for greater control HEAVY-DUTY METAL GEAR HOUSING For increased life and durability) TOOL-LESS GUARD ADJUSTMENT For quick guard changes **POWERFUL 8 AMP MOTOR** Power to get the job done) FITS 5" DISCS



7292-02 1/4 SHEET SANDER WITH PRESSURE CONTROL

Features

) DUST SEALED SWITCH For extended tool life PRESSURE CONTROL TECHNOLOGY Helps to produce professional results MICRO-FILTRATION CANISTER Captures and contains fine dust particles **) BUILT-IN VACUUM ADAPTER**

Specifications

Rating	2 Amps, 120V
Speed	14,000 OPM
Vacuum Port	Fits 1-1/4" Hose
Weight	2.6 lbs

Includes

1/4 Sheet Palm Sander



9295-01 4-1/2" ANGLE GRINDER

Features

Allows for greater control For increased life and durability For quick guard changes **POWERFUL 6 AMP MOTOR** Power to get the job done

Paper Punch Plate 2 Sheets of Abrasive Paper



SR250801 CORDED DETAIL SANDER

Features

DUST SEALED ON/OFF SWITCH

For control and durability

VIBRATION CONTROL Counterweight balance minimizes vibration

HOOK & LOOP ATTACHMENT

Quick and easy sanding sheet changes COMPACT & LIGHTWEIGHT

Use for a variety of detail applications) MICROFILTRATION DUST CANISTER Captures fine dust particles

Specifications

Rating	120V, 1.0A
Speed	12,000 OPM
Pad Size	4"x 5-3/4" (102 x146 mm)
Dust Port	Fits 1-1/4" Vacuum Hose
Weight	1.77 Lbs (0.8 Kg)

Includes

Detail Sander 3pcs 120 Grit Sand Paper Dust Box



Features

3-POSITION SIDE HANDLE WITH WRENCH STORAGE Allows for greater control **HEAVY-DUTY METAL GEAR HOUSING** For increased life and durability) TOOL-LESS GUARD ADJUSTMENT For quick guard changes **POWERFUL 6 AMP MOTOR** Power to get the job done

> PADDLE SWITCH CONTROLS

Specifications

Rating	8 Amps, 120V
Speed	12,000 RPM
Disc Size	5" (125 mm)
Cord Length	6ft (1.8 m)
Tool Size	14" x 5-11/16" x 4-7/16" (356 x 144 x 112 mm)
Weight	4.85 lbs (2.2 kg)

Includes

Angle Grinder Grinding Disc Wrench Storage Handle Grinding Guard Wrench

3-POSITION SIDE HANDLE WITH WRENCH STORAGE) HEAVY-DUTY METAL GEAR HOUSING) TOOL-LESS GUARD ADJUSTMENT

Specifications

Rating	6 Amps, 120V
Speed	11,000 RPM
Disc Size	4-1/2" (115 mm)
Cord Length	6ft (1.8 m)
Tool Size	10-3/4" x 5" x 4-3/8" (272 x 126 x 108mm)
Weight	4.65 lbs (2.11 kg)

Includes

Angle Grinder Grinding Disc Side Handle Wrench

9295-02 6 AMP 4-1/2" ANGLE GRINDER

Specifications

Rating	6 Amps, 120V
Speed	11,000 RPM
Disc Size	4-1/2" (115 mm)
Cord Length	6ft (1.8 m)
Tool Size	10-3/4" x 5" x 4-3/8" (272 x 126 x 108 mm)
Weight	4.65 lbs (2.11 kg)

Includes

Angle Grinder 3 pcs. Grinding Discs Side Handle Wrench Soft Bag



3540-02 7" WET TILE SAW

Features

) STAINLESS STEEL TABLE TOP Resistant to corrosion) ADJUSTABLE RIP FENCE WITH MITER GAUGE For accurate straight and miter cuts) BEVEL CUTS TILE FROM 0 TO 45 DEGREES Flexibility for dierent cut types **) 7 IN. CONTINUOUS RIM DIAMOND BLADE**

Provides fast and smooth cutting

) BLADE COOLING WATER RESERVOIR Keeps blade cool and minimizes dust and debris

Specifications

Rating	4.2 Amps, 120V
Speed	3600 RPM
Blade	7" Diameter Diamond
Bevel Stops	0° and 45°
Miter Gauge	0° to 45°
Weight	18 lbs

Includes Wet Tile Saw 7" Diamond Blade Blade Guard

Blade Wrenches



3320-01 10" DRILL PRESS

Features

) 1/2-INCH KEYED CHUCK Bump-off switch for added safety) 5 SPEEDS 570 - 3,050 RPM) ADJUSTABLE DEPTH STOP) LASER X 2 2-BEAM LASER For precise hole alignment

3550-02 7" WET TILE SAW WITH HYDRO LOCK SYSTEM

Features

HYDRO LOCK WATER CONTAINMENT SYSTEM Keeps water contained near the blade and reduce clean-up time

> SLIDING SIDE EXTENSION Provides support for tiles up to 18 x 18 in.

) ALUMINUM TABLE TOP

Durable, rust-resistant surface

) ADJUSTABLE RIP FENCE WITH MITER GAUGE For accurate straight and miter cuts

) BEVEL CUTS TILE AT 0, 22.5 AND 45 DEGREES Gives flexibility for different cut types

Specifications		
Rating	5 Amps, 120V	
Speed	3600 RPM	
Blade Size	7"	
Bevel Stops	0°, 22.5°, 45°	
Max Tile Size	18" x 18"	
Miter Angle	0°-45°	
Weight	18 lbs.	
	·	

Includes

Specifications

7" Wet Tile Saw 7" Diamond Blade Blade



Features

Features

Keeps cutline free of debris) ARTICULATING LED WORKLIGHT Ensures that the work piece is clearly lit.1.5 in. dust port keeps work area clear of dust ELECTRONIC VARIABLE SPEED CONTROL Helps cut a variety of materials) TILTING 16" X 10" WORK TABLE Tilts 0-45 degrees for precise) 16" THROAT Allows for cutting thicker pieces

3601-02 7 AMP FLOORING SAW

Features

- CUTS SOLID, ENGINEERED AND LAMINATE FLOORING WITH EASE
- MAKES CROSS, MITER AND RIP CUTS LIGHTWEIGHT DESIGN FOR TRANSPORT AND
- USE AT ANY PROJECT LOCATION MITER DETENTS AT 0, 22.5 AND 45 DEGREES

Specifications

Rating	7 Amps, 120V
Speed	11,000 RPM
Blade	4-3/8 in. 36 T carbide tipped blade

Includes

Flooring Saw 4-3/8" 40-Tooth Carbide-Tipped Contractor Blade Self-Aligning Rip/Miter Fence Blade Wrench Clamp Push Stick



Allows for sanding 0-90 degrees) TENSION SPRING ADJUSTMENT For secure belt tracking **) BASE WITH PRE-DRILLED HOLES** For quick and easy mounting to a bench top

For accurate measurements and repetitive drilling) 0-45 DEGREE LEFT/RIGHT TILTING WORK SURFACE

Specifications

Rating	3.2 Amps, 120V
Chuck	1/2" Metal Keyed Chuck
5 Speed Settings	570-3050 RPM
Tilting Work Surface	0°-45° Left, 0°-45° Right
Drilling Capacity	10"
Table Size	7-5/8"
Weight	52.3 lbs.

Includes

10" Drill Press Motor Unit Cast Iron Base and Work Table (2) AA Batteries Chuck Key

3335-07 16" SCROLL SAW

) INTEGRATED DUST REMOVAL SYSTEM

Specifications

Rating	1.2 Amps, 120V
Speed	500-1700 RPM
Max Thickness of Cut	2-1/2"
Table Size	16" x 10"
Cutting Stroke	7/8"
Blade Length	5"
Bevel	0°-45°
Throat Capacity	16"
Dust Port	1-1/2"
Tool Size	26" x 14.5" x 14.5"
Weight	29.5 lbs.

Includes

Scroll Saw (2) Blades

3376-01 4" X 36" BELT/DISC SANDER

) TWO-IN-ONE SANDING STATION

For sanding a variety of lengths and angles **) BEVELING TABLE TOP** Allows for sanding 45-90 degrees

) BELT ANGLE ADJUSTMENT

Specifications

Rating	4.3 Amps, 120V
Speed	0-3450 RPM
Disc Size	6"
Belt Size	4" x 36"
Belt Tilt	0°-45°
Belt Table Tilt	45°-90°
Belt Table Dimensions	6" x 4"
Disc Table Tilt	0°-45°
Disc Table Dimen- sions	6" x 4"

Includes

Belt Disc Sander 6" Abrasive Disc 4" x 36" Abrasive Belt Miter Gauge Adjustment Wrenches



3380-01 6" BENCH GRINDER

Features

 > MEDIUM AND COARSE WHEELS For a variety of materials
> 2.1 AMP MOTOR With 3,450 RPM
> BUILT-IN LED WORK LIGHTS Over both wheels
> ADJUSTABLE TOOL RESTS For accurate grinding
> RUBBER FEET Provides increase stability

Specifications

Rating	2.1 Amps, 120V
Speed	3450 RPM
Wheel Size	6" (150mm)
Tool Size	11" x 14.75" x 8" (279 x 375 x 203mm)

Includes

6" Bench Grinder with Light

Specifications



3386-01 9" BAND SAW

Features

Features

board

• **RIP FENCE** For straight, accurate cuts

• 6-TPI BAND SAW BLADE Cuts through a variety of wood materials

• ARTICULATING LED WORK LIGHT For better view of work piece and cut-line

) 1-1/2-INCH DUST PORT

Keeps work area clear of dust

> RACK AND PINION TABLE ADJUSTMENT
For quick angle and height adjustment
> 1-SPEED MOTOR

RAS900 ROUTER TABLE

Offers support for routing curved workpieces

Use with shop vacuum to keep work area clean

Helps with bit set-up for accurate cuts

SMOOTH LAMINATED MDF TOP

Workpiece moves easily along surface

Allows quick and easy set-up, table components store on

Provides support for angle cuts and narrow workpieces

> TALL FENCE WITH ADJUSTABLE MDF FENCE FACES

For common routing applications, also features out feed

) EFFICIENT COMPACT DESIGN

) STARTER PIN AND GUARD

MITER GAUGE WITH T-BAR

) 2-1/2 IN. ID DUST PORT

) BIT HEIGHT GAUGE

shims for jointing

For wood or metal based materials

Rating	2.5 Amps, 120V
Speed	2800 SFPM
Cutting Capacity	3.5"
Throat Capacity	9"
Table Dimension	12" x 11-3/4"
Blade Type	1/8" to 3/8" x 59-1/4" to 59-1/2"
Weight	31.3 lbs.

Includes

120V 9" Band Saw with Light Blade Miter Gauge Rip Fence



Specifications

Dual Outlet Power Strip Rating	15 Amps, 125V
Miter Gauge T Slot	3/4" Wide x 3/8" Deep
Dust Port Inner Diameter	2-1/2"
Bits Allowed	Up to 2-1/2" Diameter


Includes

Router Table (2) 1/16 in. Outfeed Fence Shims (3) Bit Insert Rings Miter Gauge (2) Featherboards Started Pin and Guard Bit Height Gauge Instruction Manual



/// CORDED TOOLS

SKIL

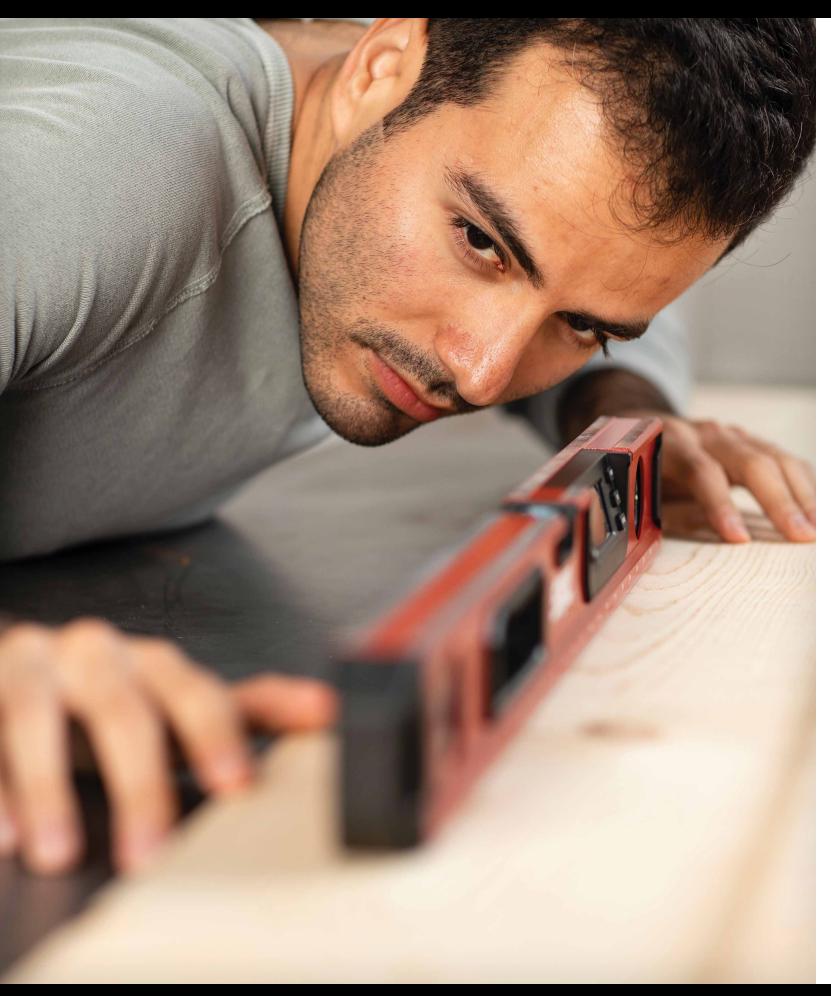

Quickly and accurately align your work with everything you need from distance measuring to leveling tools.

- > Self Leveling
- > Rechargeable Lithium Ion Battery
- > Green Lasers for Better Visibility
- > Highly Accurate





LL932401 SELF-LEVELING GREEN CROSS LINE LASER WITH PROJECTED MEASURING MARKS

Features

) PROJECTS UP TO 65FT.

Projects bright green horizontal and vertical lines onto surfaces plus includes projected measuring marks

) PROJECTED MEASURING MARKS

Measuring marks cross the horizontal and vertical lines at even intervals and make it easy to tackle jobs that require equal spacing-like painting stripes or hanging multiple pictures or shelves. Change the spacing by moving the tool closer or further away

) INCLUDES CLAMP AND CASE

Specifications

Working Range	Up to 65 ft
Laser Type	Class II, 520 nm, <1 mW
Power Supply	3.7V, 1.2 Ah Li-ion Battery
Accuracy	± 3/16 in. at 30 ft
Clamp Thread	1/4" -20 UNC

Includes

Green Beam Compact Self-Leveling Cross Line Laser with Projected Measuring Marks Clamp USB Charging Cable

Soft Bag



cabinets, and more **PROJECT LINES AT ANY ANGLE** Locking mode for projects where your lines are not level or plumb, like a diagonally tiled backsplash

) CONVENIENT CHARGING The Integrated Rechargeable Lithium-Ion battery has a convenient micro-USB charging port

) TRIPOD & CASE INCLUDED Tripod adjusts to a max height of 31/2 ft.; position on the floor or table



LL9322G-01 SELF-LEVELING 360 DEGREE GREEN CROSS **LINF LASER WITH TRIPOD**

Features

) PROJECTS UP TO 100 FEET

Laser projects a bright green cross line laser with a 360 horizontal laser that goes all the way around a room

) SUPERIOR VISIBILITY

The bright green laser lines offer improved visibility for ease of measuring

> SELF-LEVELING

Laser level automatically levels to cut out any guesswork

CONVENIENT CHARGING

The Integrated Rechargeable Lithium-Ion battery has a micro-USB charging port with indicators displaying the battery's life

) TRIPOD INCLUDED

The adjustable tripod can be raised up to a max height of 3-1/2 ft. and lets you securely position the tool on the floor or a table

Specifications	
Laser Visibility	100ft (30m)
Laser Accuracy	±3/16" at 30ft (±0.5mm/m)
Laser Type	Green Beam, 520nm, Class 2, <1mW
Mounting Thread	1/4" -20 UNC
Tool Size	3.78" x 2.87" x 4.21" (96 x 73 x 107mm)

Includes

Self-leveling 360 Degree Green Cross Line Laser Soft Bag 43" Tripod USB Charging Cable

Specifications



*

SKIL

LINF LASER

) SELF-LEVELING

Features

Features

PROJECTS UP TO 50FT. Projects a bright red horizontal and vertical line onto surfaces to align and install projects like cabinets, trim, or chair rail molding > SELF-LEVELING

) CONVENIENT CHARGING

LL9324G-01 SELF-LEVELING GREEN CROSS LASER WITH CLAMP

Features

) PROJECTS UP TO 65 FT.

This laser level tool projects a bright green horizontal and vertical line onto surfaces to align and install projects like cabinets or trim

) SUPERIOR VISIBILITY

The bright green laser lines offer superior visibility

) SELF-LEVELING

Automatically levels to cut out any guesswork

CONVENIENT CHARGING

The Integrated Rechargeable Lithium-Ion battery has a convenient micro-USB charging port and indicators that show when the battery is running low

) CLAMP INCLUDED

Attaches to the top or bottom of the laser for easy, secure placement

Power Supply	3.7V, 1.2 Ah Li-ion Battery
Working Range	65ft (20m)
Laser Accuracy	±3/16 in at 30ft (±0.5mm/m)
Laser Type	Green Beam, 520nm, Class 2, <1mW
Mounting Thread	1/4" -20 UNC
Tool Size	2.8" x 2.4" x 3" (71 x 67 X 77mm)

Includes

Green Self-leveling Cross Line Laser Clamp USB Charging Cable Soft Bag



Leveling made easy **) TWO BACKLIT BUBBLE VIALS** Easily level the tool) MAGNET ACCESSORY

Attaches the tool to any metal surface

) ADHESIVE PUTTY Attaches tool to drywall, wood, and other surfaces

) PROTRACTOR ACCESSORY For tile and floor aligning projects

LL932201 SELF-LEVELING 360 DEGREE RED CROSS

Laser level automatically levels to cuts out any guesswork) PROJECT UP TO 65FT.

Project a bright red continuous horizontal line, around a room, up to 65 ft., for projects like installing molding,

Specifications

Working Range	Up to 65 ft in Dia.
Laser Type	Class II, 635 nm, <1 mW
Accuracy	± 3/16 in. at 30 ft
Power Supply	Integrated Li-ion Battery, Micro-USB Charging Port
Tripod Thread (On Base)	1/4" -20 UNC

Includes

Self-leveling 360 Degree Red Cross Line Laser Soft Bag 43" Tripod USB Charging Cable

LL932301 SELF-LEVELING RED CROSS LINE LASER

Automatically levels to cut out any guesswork

Integrated Rechargeable Lithium-Ion battery has a convenient micro-USB charging port

) INCLUDES CLAMP AND CASE

Specifications

Working Range	Up to 50 ft
Laser Type	Class II, 635 nm, <1 mW
Power Supply	3.7V, 1.2 Ah Li-ion Battery
Accuracy	± 3/16 in. at 30 ft
Clamp Thread	1/4" -20 UNC

Includes

Red Beam Compact Self-leveling Cross Line Laser Clamp USB Charging Cable Soft Bag

8101-SL MULTI-FUNCTIONAL LINE LASER

Specifications

Laser Type	Class II, 635 nm
Max Output	1 mW
Power Supply	3 x AG13 button cell
Accuracy	\pm 1/4-in at 10 ft (deviation of \pm 10 mm at 5 m)

Includes

Protractor Accessory Magnet Accessory Button Cell Batteries Adhesive Putty



ME981901 100FT. LASER DISTANCE MEASURER & LEVEL

Features

) THREE WAYS TO MEASURE Laser measures distance, area. or in real time up to 100 feet

) DIGITAL LEVELING MODE Digital accuracy with real-time arrow guidance

) INDIRECT MEASURING Calculates distances past obstacles

) HOLD FEATURE

Save readings for later reference) RECHARGEABLE LITHIUM-ION BATTERY Easily charge via a micro USB port

Specifications

Measuring Range	Up to 100ft.
Distance Measuring Accuracy	±1/8"
Angle Measuring Accuracy	±0.5°
Units	Metric and Imperial

Includes

100ft Laser Measurer & Digital Level Bag

Micro-USB Charging Cord



LV941901 24" DIGITAL LEVEL

Features

Easy to see and accurate) DIGITAL LCD SCREEN Backlit for easy reading) LEVEL INDICATORS Real-time leveling guidance) MEMORY FEATURE Store values for reference) MAGNETIC EDGE

For easy one-handed use



ME9821-00 65FT. LASER MEASURER WITH WHEEL

Features

Features

) INSTANT ACCURACY

to-read digital display) ALIGN WITH EASE

protractor for accuracy

) COMPACT SIZE

with just one hand

) POINT & CLICK LASER DISTANCE MEASURING

Measure distances up to 65 feet, use continuous measuring to find a target distance, and calculate area on the fly

WHEEL MEASURING MODE

Easily measure uneven and curved surfaces with wheel measuring

Level provides real-time leveling guidance on an easy-

Compact and lightweight design allows you to level in

A magnetic edge makes the laser level easy to use

Laser line projects on the wall or floor. Includes

tight spots and bring it along when on-the-go

) ONE-HANDED CONVENIENCE

) BACKLIT LCD SCREEN

Easy-to-read screen clearly displays mode and measurements in real time

Specifications	
Measuring Range	65ft. (20m)
Measuring Accuracy	±1/8 in. (±3mm)
Laser Type	Red Beam, 630- 670nm, Class 2, <1mW
Display	Auto-backlit, White on Black
Auto Shut-O	5 Minutes

Includes

Laser Distance Measure Soft Case Lanyard (2) AAA Batteries

Constitutions



) HIGH-ACCURACY BLUE VIALS The vials are easy to see, highly accurate, and show both vertical and horizontal levels READ FROM ANY PERSPECTIVE

The digital LCD screen is backlit for easy reading from any perspective, and the screen conveniently autoadjusts the orientation depending on how you hold it

) EASY TO USE when you hit 0°, 45°, or 90°

Features

) ONE-HANDED CONVENIENCE

) DUAL MEASURING



LL9325-00 COMPACT DIGITAL LEVEL WITH LINE LASER

Work	ing Range	Up to 15ft
Laser	Туре	Class II, 635nm, <1 mW
Level	Accuracy	$\pm 0.1^\circ$ at 0° and 90°

Includes

Digital Level Line Laser Adhesive Putty Magnetic Wall-Mount Base Protractor with 0° to 90° Marks 2 AAA Batteries



Specifications

) HIGH-CONTRAST BLUE VIALS

Specifications

Digital Screen	High Visibility
Blue Vials	High Contrast
Accuracy of Digital Angle	±0.2°
Angle Indication	Degrees, in/ft, mm/m and %
Power Supply	2 AAA Batteries
Length	24" Excluding Endcaps

Includes

24" Digital Level Bag 2 AAA Batteries

LV941801 12" DIGITAL LEVEL

Up and down arrow indicators give you real-time leveling guidance, and an optional audible tone lets you know

A magnetic edge makes it easy to use with just one hand


See centimeters on one side and inches on the other

Specifications

Size	12" (30cm)
Digital Level Accu- racy	±0.05° at 0° & 90°, ±0.2° at other angles
Display	Auto-backlit, black on white
Auto Shut-Off	5 Minutes
Tool Size	14" x 1.22" x 2.5" (355 x 31 x 63mm)
Weight	0.97 lbs. (0.44kg)

Includes

12" Digital Level Soft Bag (2) AAA Batteries

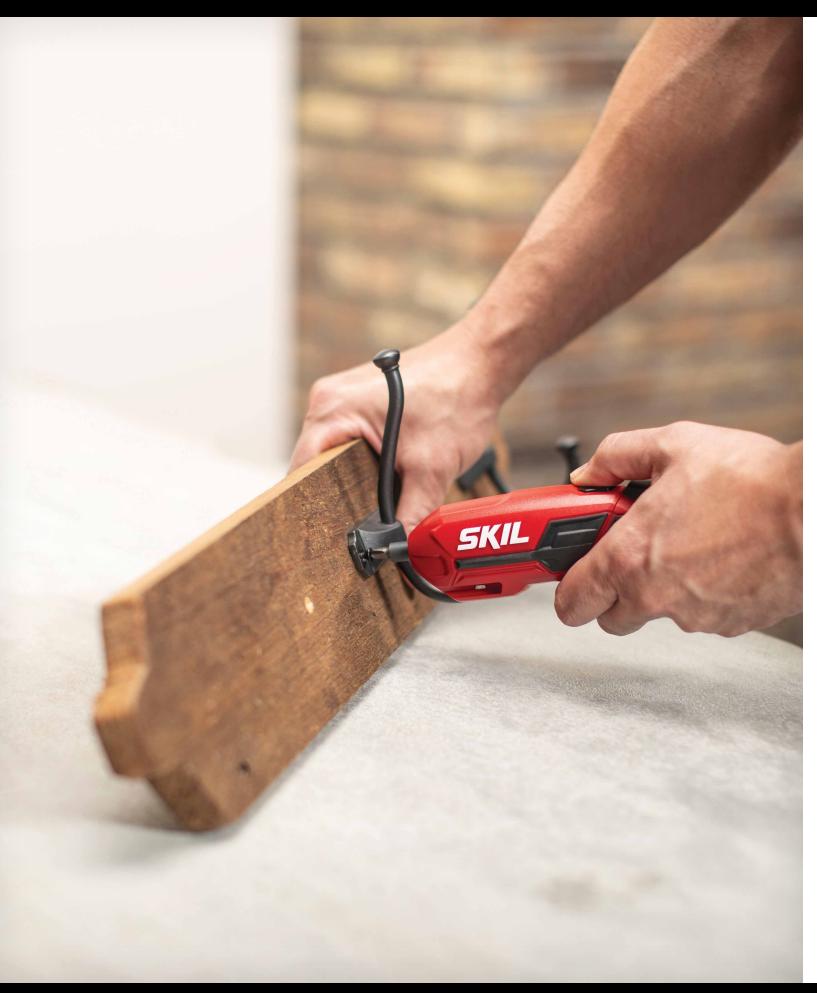

4V SCREWDRIVERS

Your go-to tool to get into tight spaces.

ACCESSORIES

Get the most out of your tools with bits, blades and more for all of your projects.





SD561201 RECHARGEABLE 4V SCREWDRIVER WITH CIRCUIT SENSOR[™] TECHNOLOGY

Features

) PATENTED CIRCUIT SENSOR™ TECHNOLOGY Safely detects electrical current in outlets, switches and fixtures

) FORWARD & REVERSE COLLAR Easily change bit direction with a twist of the collar

) INTEGRATED RECHARGEABLE LITHIUM-ION BATTERY Micro USB charging is ready when you are

CINCH LOCK™ COLLET Fast and convenient bit changes

) DUAL LED LIGHTS

Improves use in low light, with after glow) AUTO SPINDLE LOCK Bit locks for convenient manual use

Specifications

Speed	230 RPM
Battery Type	Integrated Li-Ion
Battery Capacity	1.3Ah
Collet Size	1/4"

Includes

4V Screwdriver with Circuit Sensor[™] Technology USB Charging Cable 9pc Bit Kit Magnetic Insert Bit Holder



·---

SD5618-03 RECHARGEABLE 4V SCREWDRIVER WITH 42 PC **BIT KIT**

Features

) LITHIUM-ION BATTERY Power up your electric screwdriver anywhere with a 4V rechargeable lithium-ion battery and micro USB charger) FOR EVERYDAY USE This power screwdriver was designed for your everyday home and DIY projects **SLIM BIT GRIP COLLAR** 4X the magnetic force to hold screws securely for one handed use; pair with included slim bits

CAM SCREW SLEEVE Provides guick and easy support for cam screws in ready to assemble furniture **) DUAL MAGNETIC BIT STORAGE** Compact for convenient, ready to go storage



SD561801 RECHARGEABLE 4V SCREWDRIVER

Features

) 1/4 IN. HEX DRIVE Securely holds standard 1/4" bits **RECHARGEABLE LITHIUM-ION BATTERY** Convenient Micro-USB charging

) CHARGING INDICATOR Light displays charging status

) FORWARD/REVERSE INDICATOR Light displays charging status

Specifications			
	Voltage	4V	
	Chuck	6.35mm (1/4") Hex Chuck with Magnetic Function	
	No-Load Speed	220 RPM	
	Tool Size	5.7" x 1.9" x 5"	
	Net Weight	0.81lbs (0.37kg)	

Includes

4V Screwdriver 3 in. Magnetic Bit Holder 9pc Bit Set USB Charging Cable USB Adapter



SMXS8501 120PC DRILLING AND SCREW DRIVING KIT WITH BIT GRIP[™]

Features

) 4X MAGNETIC FORCE Universal magnetic Bit Grip[™] collar

Includes

21pc 2" Power Bits 75pc 1" Insert Bits 2pc 3.5" Power Bits 5pc Nut Drivers 13pc Gold Ferrous Drill Bits 2pc Spade Bits Universal Magnetic Bit Collar Magnetic Insert Bit Holder / Driver Guide



SD561802 RECHARGEABLE 4V PIVOT GRIP SCREWDRIVER

Features

) EASY TO USE

The perfect power screwdriver for everyday needs and **DIY** projects

PIVOT GRIP HANDLE

Not sure if you want a straight or standard grip cordless electric screwdriver? This small drill can adjust to both based on your project.

) FORGET DOWN TIME

A rechargeable lithium-ion battery keeps this tool charged over an extended period of time

) READY TO GO

Power up your electric screwdriver anywhere with micro USB charging

Specifications

Speed	220 RPM
Torque	36 in.lbs
Chuck	1/4" Hex
Tool Size	6.5" x 1.8" x 4.8" (166 x 45 x 123mm)
Weight	0.77 lbs. (0.35kg)

Includes

4V Pivot Grip Screwdriver 9pcs 1" Bits 3" Magnetic Bit Holder USB Charging Cable USB Adapter



MXS8505 44PC DRILLING AND SCREW DRIVING BIT KIT WITH BIT GRIP[™]

Features

) 4X MAGNETIC FORCE Universal magnetic Bit Grip™ collar

Includes

26 Screw Driving Bits 16 Drill Bits Universal Magnetic Bit Collar Magnetic Insert Bit Holder / Screw Guide

Specifications

Chuck	1/4" Hex
Torque	36 in.lbs
Speed	220 RPM
Integrated Battery	4V
Charge Time	3 hours
Bit Kit	42 pc

Includes

4V Rechargeable Screwdriver 42 PC Bit Kit Charging Cable Charging Adapter



SDB7014 141PC SCREW DRIVING KIT WITH BIT GRIP™

Features

) PATENTED, BIT GRIP™ MAGNETIC BIT COLLAR Holds screws securely for one-handed use, with 4X Magnetic Force) IDEAL FOR DRIVING INTO A VARIETY OF SURFACES Included wood, metal and plastic) INCLUDES CONVENIENT CARRYING CASE To keep your bits organized and easy to access

Includes

73pc 1" Screwdriving Bits 38pc 2" Screwdriving Bits 4pc 3.5" Screwdriving Bits 12pc 1" Tamperproof Bits 10pc Nut Drivers 2pc Socket Adapters Universal Magnetic Bit Collar Magnetic Insert Bit Holder



SDB7016 104PC SCREW DRIVING BIT SET WITH BIT GRIP[™]

Features

) VERSATILE Bits can be used in your power tool or as a hand tool with the included handle **CONVENIENT AND STRONG** Patented, bit grip magnetic bit collar holds screws securely for one-handed use, with 4x magnetic force

WIDE ASSORTMENT A variety of the most commonly used driving bits

) STAY ORGANIZED

Includes

Nut Drivers - 10pcs, 1" Security Bits - 30pcs, Slim Magnetic Bit Collar - 1pc, Screwdriver Handle - 1pc, 4" Slim Long Screwdriving Bits - 7pcs, Wing Nut Driver - 1pc, 1" Screwdriving Bits - 51pcs, 2" Socket Adapter - 1pc, 4" Bit Holder – 1pc, 2-1/2" Magnetic Bit Holder – 1pc



SDB7013 50PC SCREW DRIVING BIT KIT

Features

) PATENTED BIT GRIP™ MAGNETIC BIT COLLAR Holds screws securely for one-handed use, with 4X magnetic force) A VARIETY OF THE MOST COMMONLY USED DRIVING BITS ALL IN ONE KIT An assortment of Phillips, slotted, hex, and square bits) INCLUDES CONVENIENT CARRYING CASE To keep you bits organized and easy to access

Includes

1" Screwdriver Bits: 9pc Phillips, 6pc Square, 6pc Star, 6pc Hex and Slotted 2" Screwdriving Bits: 5pc Phillips, 4pc Square, 6pc Star, 3pc Slotted



RTB7500 15PC ROUTER BIT SET

Features

) LONG LIFE Carbide tips for long lasting edges **WIDE ASSORTMENT** Includes several edge-forming, straight, and joinery bits **) STAY ORGANIZED** Includes convenient carrying case to keep your bits organized and easy to access

Includes

Flush Trim – 1pc, 45° Chamfer Bit – 2pcs



92 www.skil.com

OSA8001 18PC OSCILLATING ACCESSORY SET

Features

) ONE SET, MANY USES Cut, sand, scrape and more with multiple accessories **) SURFACE VARIETY**

Flush cut blade for wood, plastic and metal

) EASY BLADE CHANGE

Open back attachment design for quick blade change

STAY ORGANIZED Includes convenient carrying case to keep your blades organized and easy to access

Includes Rigid Scraper Blade Flexible Scraper Blade 3" Semicircular Blade 1-3/8" Flush Cut Blade 3" Sanding Pad 3" x 3" x 3" Sandpaper - 12 pcs



5-1/2" 18T

Circular Saw Blade



CRB1002 6-1/2" 24T Circular Saw Blade

Tool Storage Bag

BG4533-00

4/5/6PC 17.7" Power

5 Pack

/// 4V TOOLS & ACCESSORIES

Includes convenient carrying case to keep your bits organized and easy to access

3/8" Bearing with Washer - 1pc, Rabbeting Bits - 2pcs, Roundover Bits with Bearing – 3pcs, Roman Ogee – 1pc, Hinge Mortising Bit – 1pc, Dovetail Bit - 1pc, 1/2" Bearing with Washer - 1pc, Straight Bits - 1pc,



CDA9000 5" Sanding Disc 60 Grit



CDA9001 5" Sanding Disc 80 Grit 5 Pack



CDA9002 5" Sanding Disc 120 Grit 5 Pack



HIGH PERFORMANCE BLADES AND ACCESSORIES

WOOD



75924B25 7-1/4 IN. x 24T Framing Saw Blade BULK Pack (25) Arbor: 5/8" round and 13/16" diamond knockout Kerf: 1.8mm Compatibility: SPT67WL. SPT67WMB, SPT67M8, SPT77W, SPT77WML, SPTH77M



WOOD

75940 - 7-1/4 IN. x 40T Framing Saw Blade Arbor: 5/8" round and 13/16" diamond knockout Kerf: 1.8mm Compatibility: SPT67WL, SPT67WMB SPT67M8 SPT77W, SPT77WML, SPTH77M



WOOD

76824 - 8-1/4 IN. x 24T Worm Drive Framing Saw Blade Arbor: 13/16" diamond knockout Kerf: 2.05mm Compatibility: SPT78W



WOOD

SPT1012 - 8-1/4" **Circular Saw Blade** Arbor: 5/8" round

Kerf: .09 mm Compatibility: Major brands hand saws and table saws



WOOD

75240 - 10 IN. x 40T Table Saw Blade Arbor: 5/8" round Kerf: 2.15mm Compatibility: SPT70WT, SPT99

SKILSAW. 9 H



WOOD

76240 - 10-1/4 IN. x 40T Worm Drive Saw Blade Arbor: 13/16" diamond knockout Kerf: 2.15mm Compatibility: SPT70WM



WOOD

SPT1010 - 12" X 60T Miter Saw Blade Arbor: 1" round Kerf: 2.54 mm Compatibility: SPT88

COORCEPTION METAL SECTION AND A SECTION AND WOOD WITH NAILS

• SKILSAW. 6

SPT2004-05 - 6 IN. Wood w/Nails Reciprocating Saw Blade (5pk)

Compatibility: SPT44A-00, SPT44-10

SKILSAW. 9 WIN W SKILSAW SPT2005-05 - 9 IN. Wood w/Nails Reciprocating

Saw Blade (5pk) Compatibility: SPT44A-00, SPT44-10



SPT2008-05 - 9 IN. SPT2007-05 - 6 IN. Metal Reciprocating Saw Metal Reciprocating Saw Blade (5pk) Blade (5pk)

Compatibility: SPT44A-00, SPT44-10 Compatibility: SPT44A-00, SPT44-10



Diamond Blade

Arbor: 7/8"-5/8"

most maior brands

Compatibility: SPT79A and

round

95104L

Cord Assembly

Compatibility: HD77,

SHD77, SHD77M, SPT55,

HD77M,HD5825,

HD5860, MAG77LT

SPT70WM, SPT70V,

SPT77W, SPT77WM

SPT78MMC

SPT77WMI SPT78W

CONCRETE



CONCRETE

SPT4004 -7" Segmented **Diamond Blade** Arbor: 7/8"-5/8" round

Compatibility: SPT79A and most major brands

Fiber Cement Blade Arbor: 5/8" round Kerf: 2.6 mm Compatibility: SPT67FMD

MITER SAW **ATTACHMENTS**



SPT5002-FS Miter Saw Stand Compatibility: SPT88

TABLE SAW ACCESSORIES

SPT5003-FS **Table Saw Stand** Compatibility: SPT991

SPTA70WT-DD

Dado Insert Compatibility: SPT70WT



Compatibility: SPT99

SPT00C Zero Clearance Insert Compatibility: SPT70WT & SPT99



SPT00B

CHAINSAW ACCESSORIES



SPT1500 16" Full House Chain Compatibility: SPT55-11

SKILSAW. 16

SPT1501 16" Full House Chain and Bar Compatibility: SPT55-11

MISCELLANEOUS ACCESSORIES AND ATTACHMENTS



HD5825, HD5860,

SPT70V

SPT77W, SPT77WM,

SPT77WML, SPT78W,

SPT70WM SPT70WT

MAG77LT, SPT78MMC

SPT79, SPT79A, SPT99,



Compatibility: SPTH77M





WDHK01



1

Rear Outfeed Compatibility: SPT99

/// 4V TOOLS & ACCESSORIES

WOOD

WOOD



SPT1011 - 12" X 80T Miter Saw Blade Arbor: 1" round Kerf: 2.54 mm Compatibility: SPT88



SPT1000 - 16-5/16 IN. x 32T Saw Blade Arbor: 1" round Kerf: 2.4mm Compatibility: SPT70V-11

METAL



ER CEMENT

SPT1001 - 7-1/4" 4T



METAL

SK842 - 8 IN. x 42T **Drv Cut Metal Blade** Arbor: 5/8" round Kerf: 1.9mm Compatibility: SPT78MMC



SK1260 - 12 IN. x 60T **Dry Cut Metal Blade** Arbor: 1" round Kerf: 2.7mm Compatibility: SPT62MTC



Saw Hook

Compatibility: SHD77, SHD77M, HD77, HD77-02, HD5825, HD5860, SPT78W, SPT70WM



13896 Adjustable Rip Fence

Compatibility: SPT67WL, SPT67WM SPT67WMB SPT67FMD, SPT67M8, SPT77WML, SPT78W, SPT78MMC, SPT70WM SPT77W, SPT77WM



95105L Switch Kit

Compatibility: SDH77, SDH77M, SPT77W, SPT77WM, SPT77WML SPT78W, SPT70WM, SPT79, MAG77LT



95111I Brush & Cap Assembly

Compatibility: SHD77, SHD77M, HD77, HD77-02, HD5825, HD5860, SPT77W, SPT77WM, SPT77WML, SPT78W SPT79 SPT79A, SPT70WM, MAG77LT, SPT70V

